
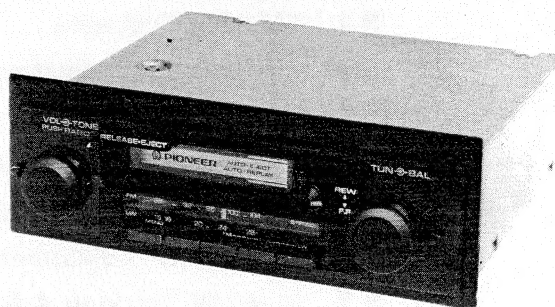


KP-3500**U, E****KP-3800****E****CASSETTE CAR STEREO
WITH AM/FM-STEREO****CASSETTE CAR STEREO
WITH LW/MW/FM-STEREO**

SERVICE MANUAL

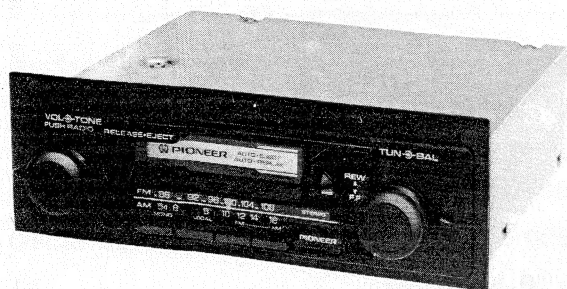

Subject: For Cassette Mechanism, refer to the Service Manual of Model KP-8000 or KP-5000.

SPECIFICATIONS

General

Power source DC 13.8V (11~16V allowable)
 Grounding system Negative type
 Power output (max.) 6W + 6W
 (continuous) 5W + 5W
 Load impedance 4Ω (2 ~ 8Ω allowable)
 Max. current consumption 1.2A
 Dimensions (W × H × D) 180 × 50 × 150 mm
 (7-1/8 × 2 × 5-7/8 in.)
 Nose size (W × H × D) 105 × 42 × 16 mm
 (4-1/8 × 1-5/8 × 5/8 in.)
 Shaft interval 130 mm (5-1/8 in.)
 Weight 1.9 kg (4.2 lbs.)

Tape player

Tape Compact cassette tape (C-30~C-90)
 Tape speed 4.76 cm/sec. (+0.19 cm/sec.)
 (-0.05 cm/sec.)
 Fast forward time Within 100 sec. for C-60
 Rewind time Within 100 sec. for C-60
 Wow & flutter No more than 0.28% (WRMS)
 Frequency response 50~12,000 Hz
 Cross talk More than 40 dB
 Signal-to-noise ratio More than 45 dB

FM tuner

Frequency range 88~108 MHz (KP-3500/U, E)
 88~104 MHz (KP-3800/E)
 Usable sensitivity 20.8 dBf (3 μV/75Ω) (KP-3500/U)
 22.8 dBf (5.2 μV/150Ω) (KP-3500/E, KP-3800/E)

50 dB quieting sensitivity

..... 23.2 dBf (4 μV/75Ω, mono) (KP-3500/U)
 25.2 dBf (7.0 μV/150Ω, mono) (KP-3500/E, KP-3800/E)
 Signal-to-noise ratio 60 dB
 Capture ratio 4 dB
 Selectivity 50 dB (±400 kHz)
 Image rejection 44 dB
 IF rejection 62 dB
 Distortion 0.8% (at 65 dBf, 400 Hz, mono)
 1% (at 65 dBf, 1 kHz, stereo)
 Frequency response 50~10,000 Hz
 Stereo separation 30 dB (at 65 dBf, 1 kHz)

MW (AM) tuner

Frequency range 525~1,605 kHz
 Sensitivity 25 μV
 Selectivity 25 dB (±10 kHz)
 Local/distant switch effect 17 dB attenuation
 Max. input signal (distortion 5%) 130 dB

LW tuner (KP-3800/E only)

Frequency range 150~280 kHz
 Sensitivity 180 μV
 Selectivity 25 dB (±10 kHz)
 Local/distant switch effect 17 dB attenuation
 Max. input signal (distortion 5%) 130 dB

Note:

Specifications and the design subject to possible modification without notice due to improvements.

CONTENTS

1. PARTS LOCATION	1
2. CIRCUIT DESCRIPTION	2
3. ADJUSTMENT	
3.1 FM IF Adjustment	6
3.2 FM Tracking Adjustment	7
3.3 IF/MPX Adjustment	7
3.4 AM IF Adjustment (KP-3500/U, E)	8
3.5 AM Tracking Adjustment (KP-3500/U, E)	9
3.6 MW/LW IF Adjustment (KP-3800/E)	10
3.7 MW/LW Tracking Adjustment (KP-3800/E)	11
3.8 PNS Adjustment	13
4. DIAL STRINGING	14
5. SCHEMATIC CIRCUIT DIAGRAM (KP-3500/U, E)	15
6. SCHEMATIC CIRCUIT DIAGRAM (KP-3800/E)	17
7. AM TUNER UNIT (CWE-317) (KP-3500/U, E)	20
8. MW/LW TUNER UNIT (CWE-285) (KP-3800/E)	22
9. CONTROL UNIT (CWG-061)	24
10. PNS UNIT (CWX-330) (KP-3500/U, E), (CWX-331) (KP-3800/E)	24
11. FRONT END UNIT (CWB-057) (KP-3500/U, E)	26
12. FRONT END UNIT (CWB-056) (KP-3800/E)	27
13. MAIN AMPLIFIER UNIT (CWH-084)	28
14. PRE AMPLIFIER UNIT (CWF-060)	30
15. SENSING UNIT (CWK-163)	31
16. IF/MPX UNIT (CWE-287)	32
17. MISCELLANEOUS PARTS LIST	33
18. CABINET EXPLODED VIEW	34
19. CHASSIS EXPLODED VIEW	35
20. PACKING METHOD	37

1. PARTS LOCATION

● Top View

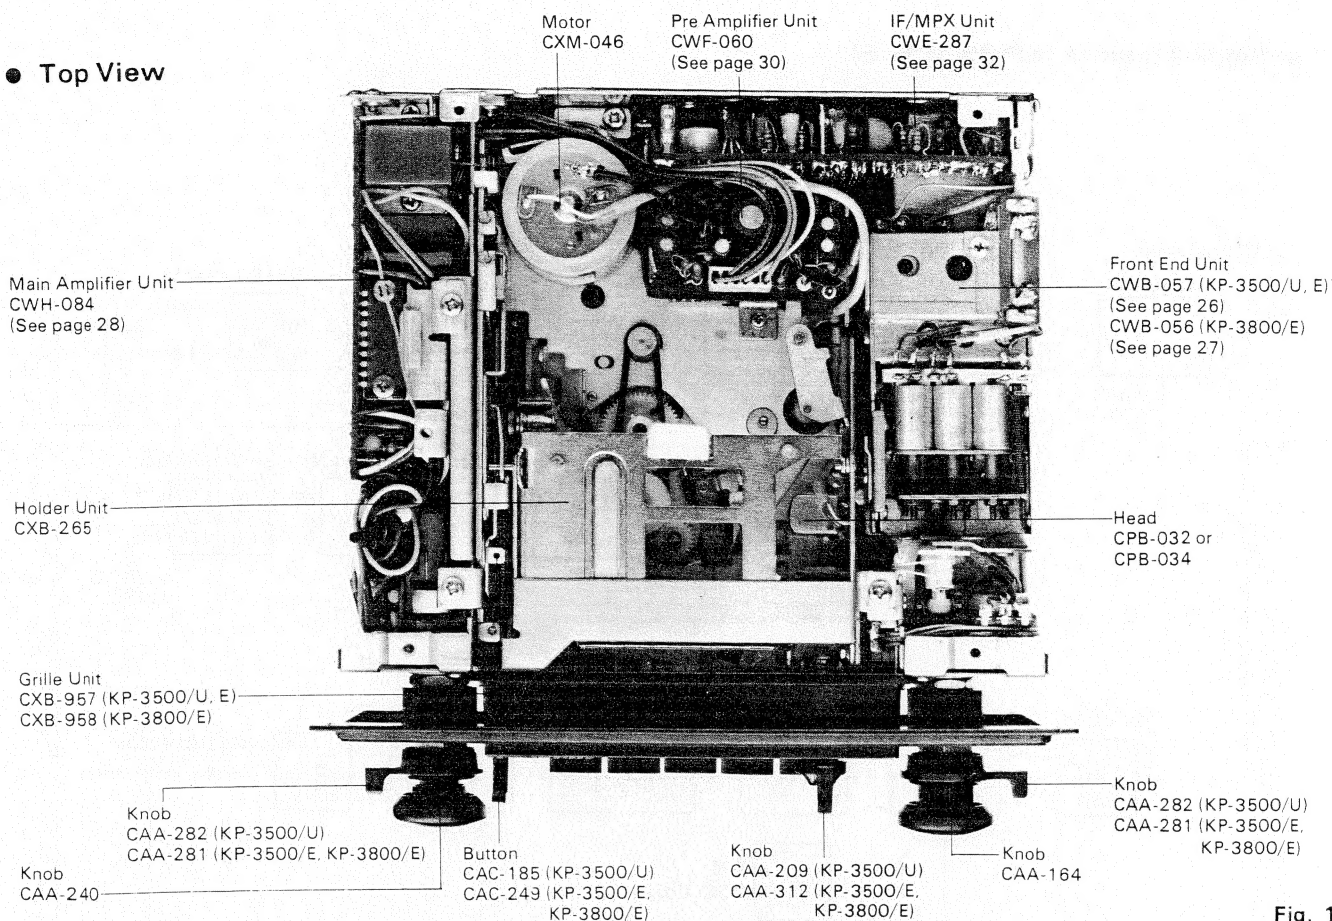


Fig. 1

● Bottom View

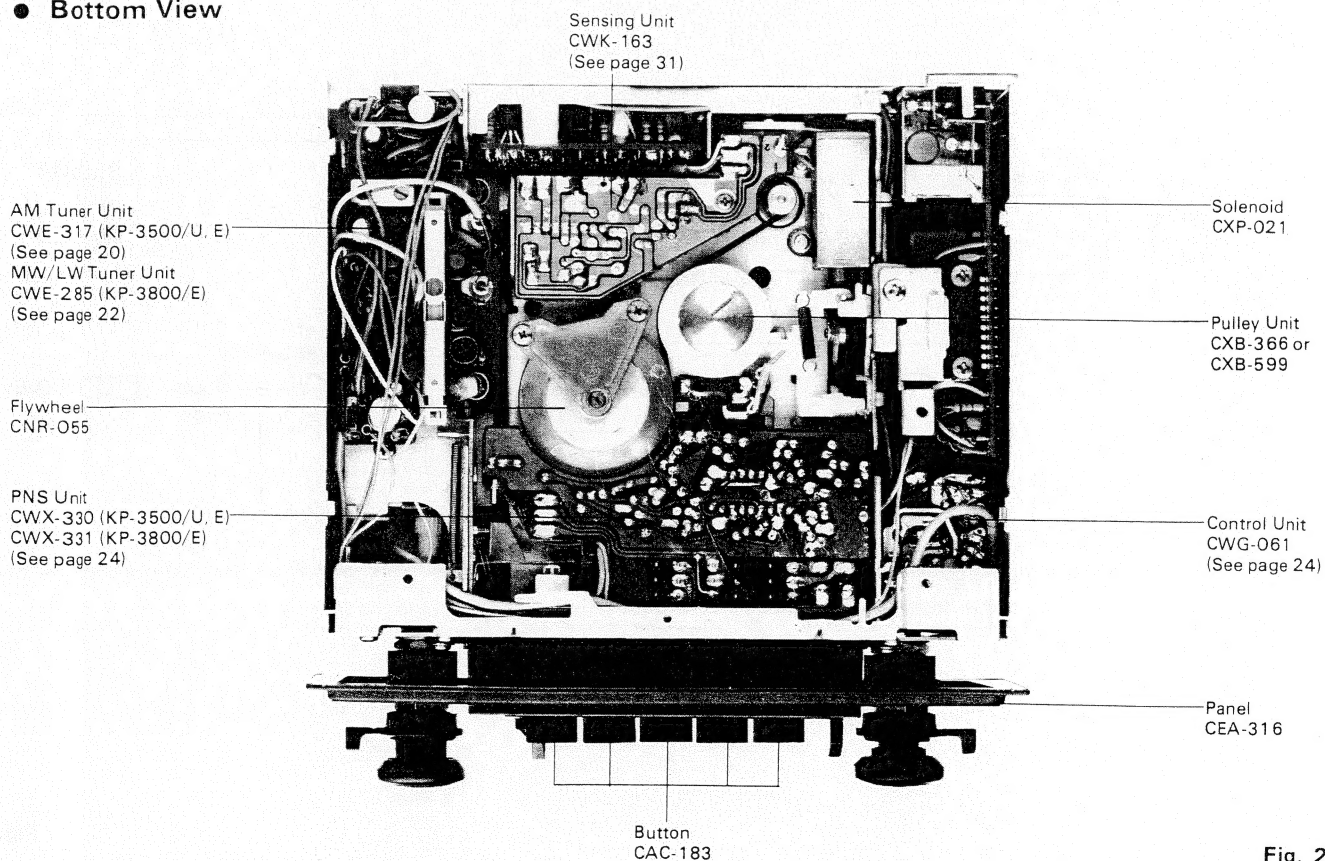


Fig. 2

2. CIRCUIT DESCRIPTION

● Block Diagram (KP-3500/U, E)

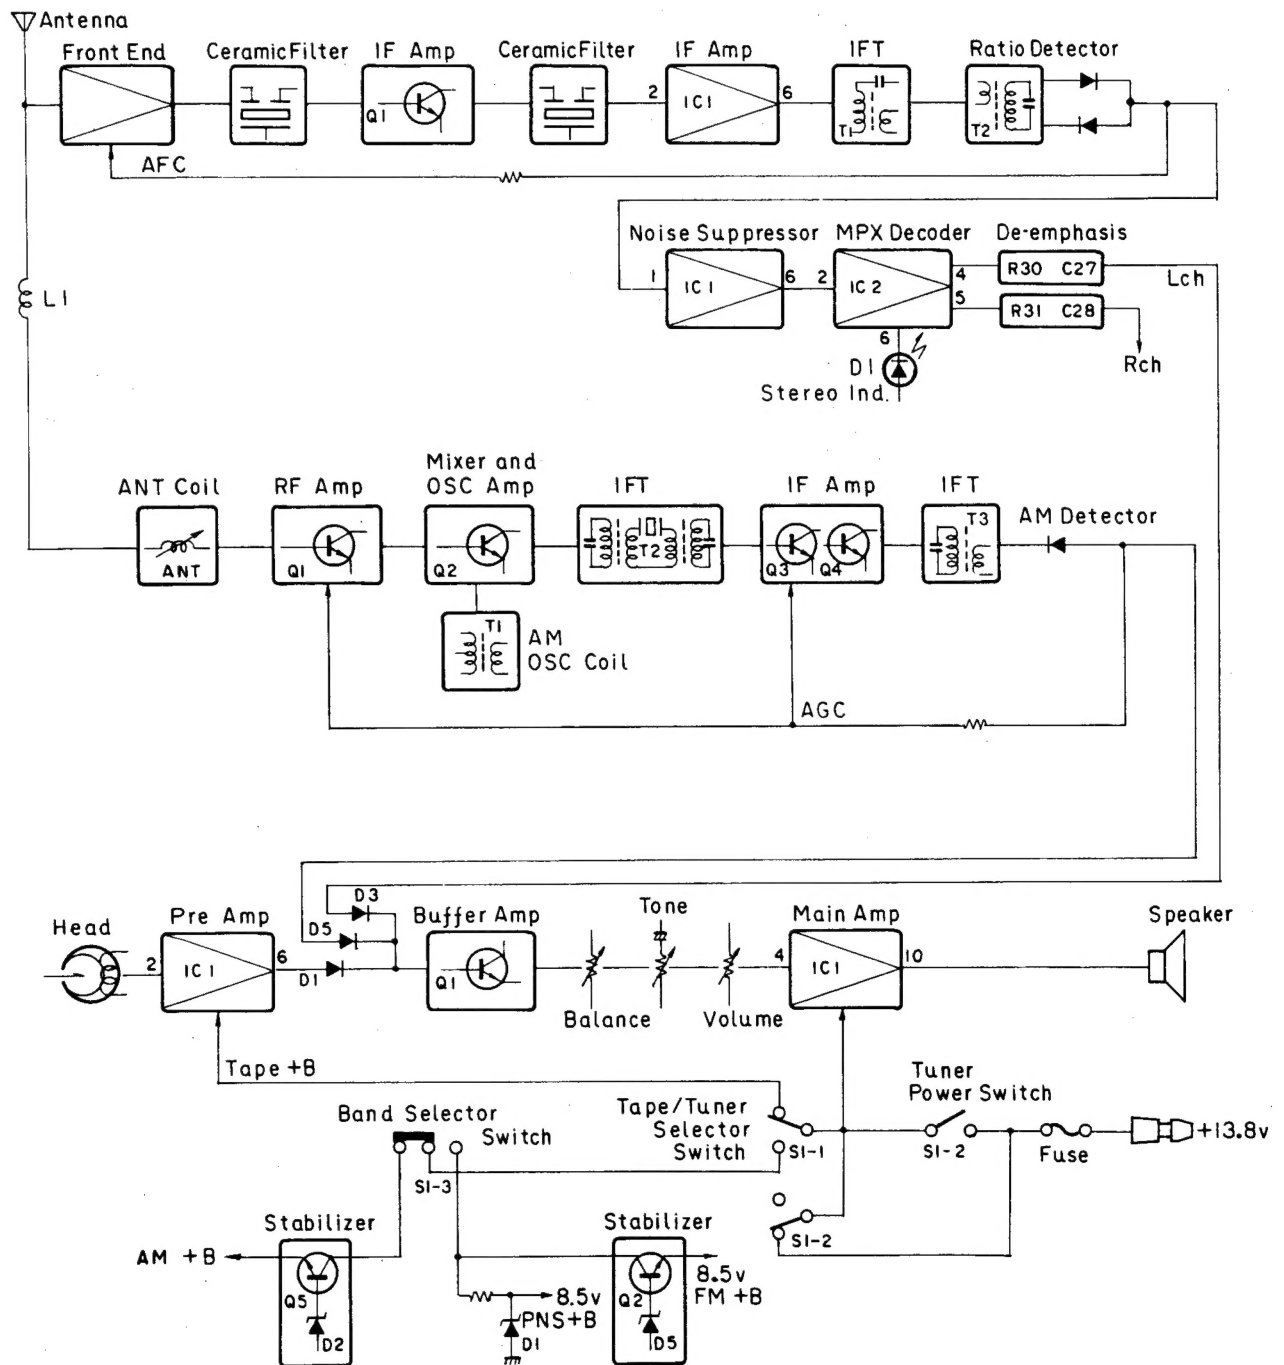


Fig. 3

CIRCUIT DESCRIPTION

● Block Diagram (KP-3800/E)

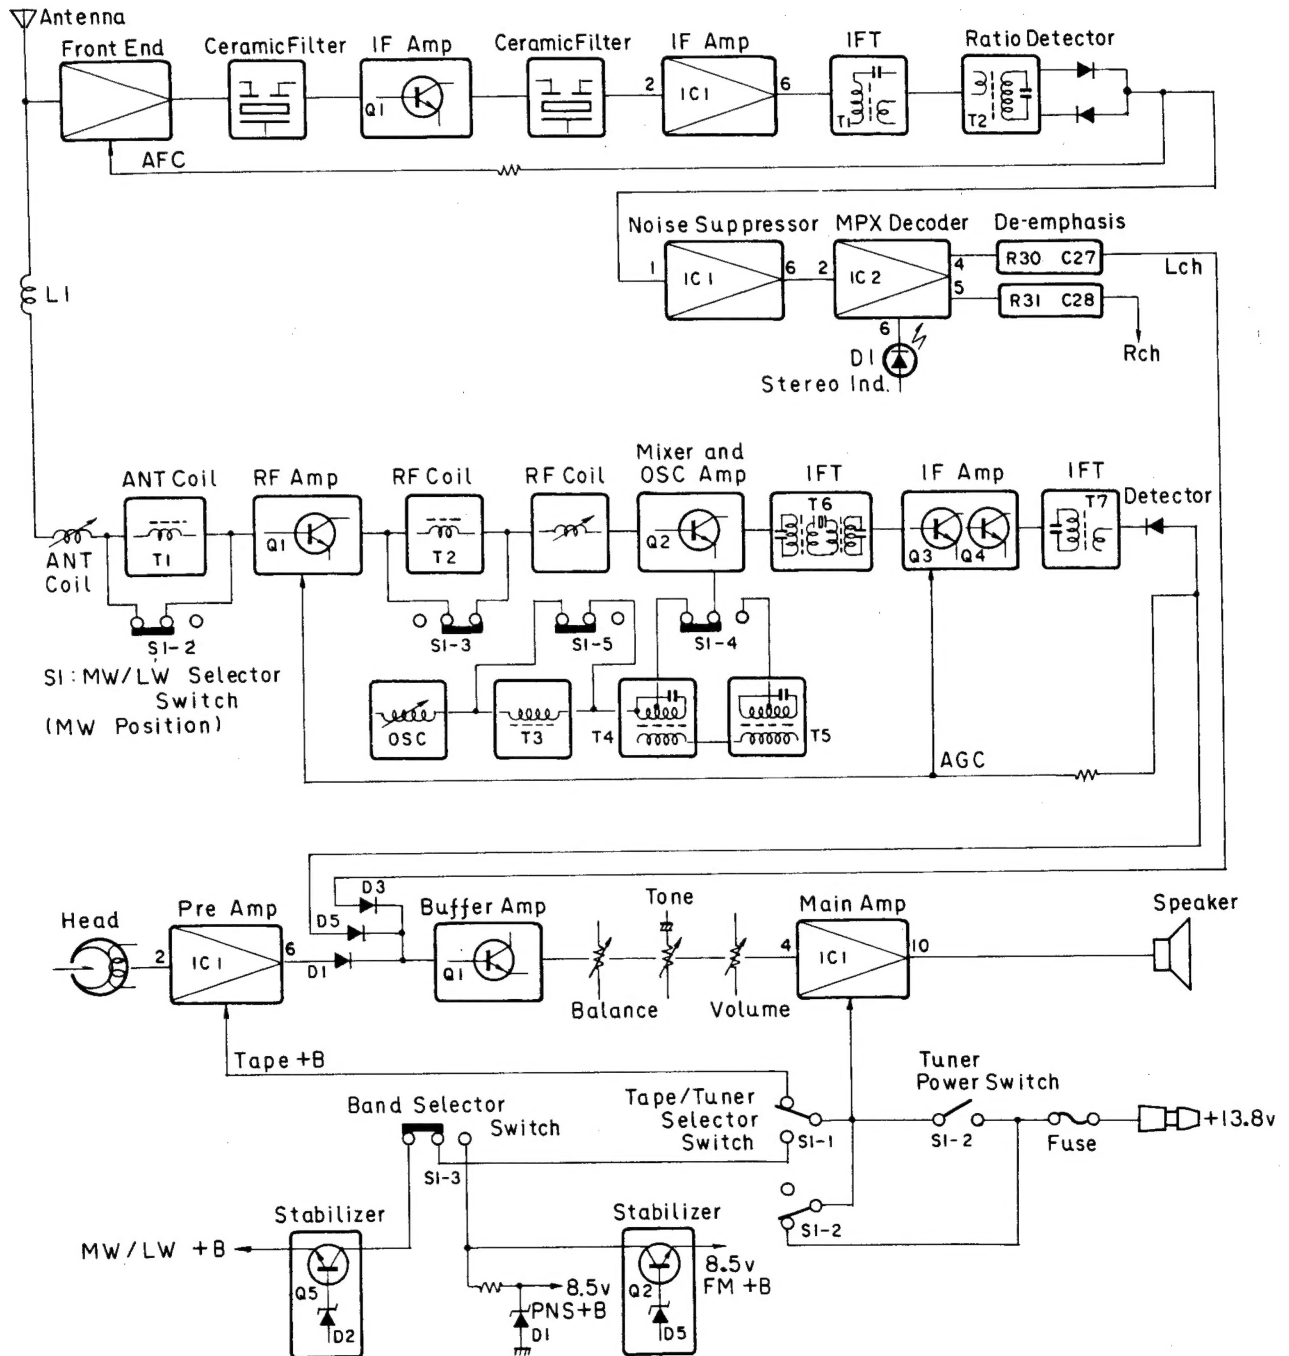


Fig. 4

CIRCUIT DESCRIPTION

● Level Diagram

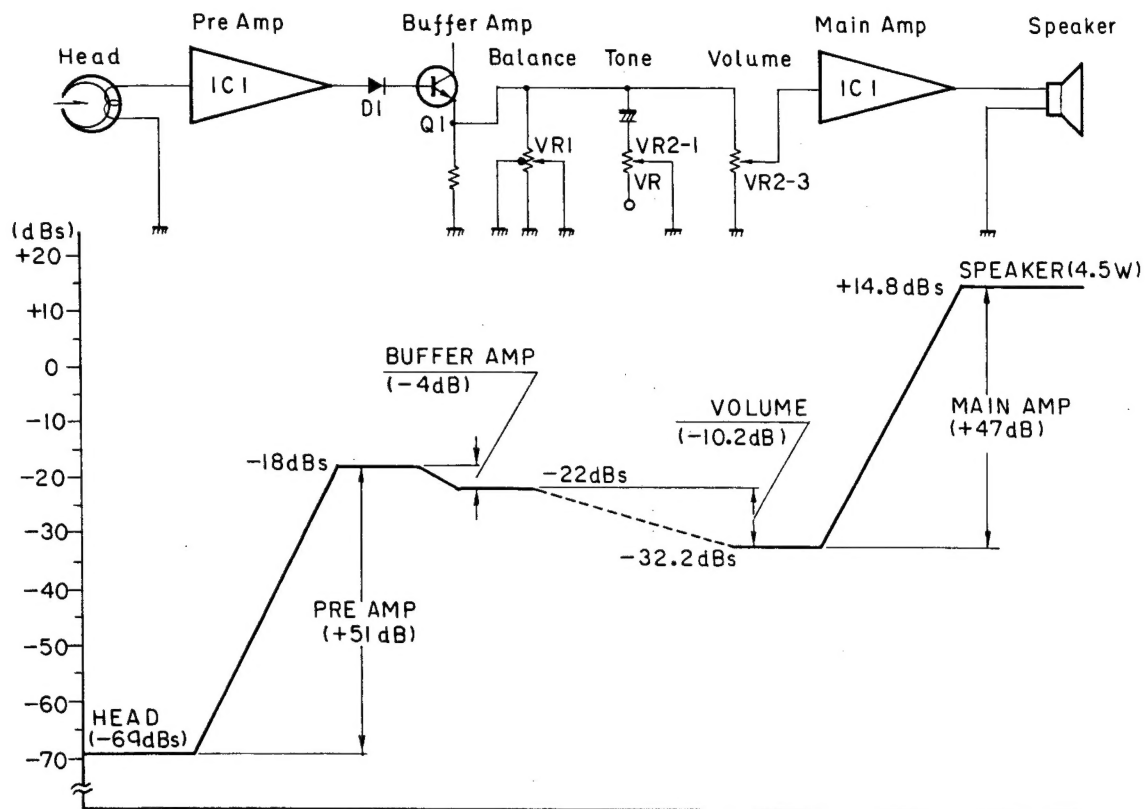


Fig. 5

● IF/MPX Unit

Two ceramic filters, Q1 (2SC1675) and IC1 (μ PC577H) are used for the input power of the IF amplifier. D3, D4 (1S188), T1 and T2 are used for the output power of the IF amplifier, and ratio detection is performed. The detected signal is given to No. 2 terminal of MPX IC (LA3350P), and

when the pilot signal enters through the actuation of PLL, the output signal is separated and the stereo indicator is lit. R30, 31, C27 and 28 are connected as the load of Nos. 4 and 5 terminals, and it determines the de-emphasis.

CIRCUIT DESCRIPTION

● Noise Suppressor

The input signal containing the pulsvie noise as illustrated in Waveform-1 is first impedance converted by the buffer amplifier, then coupled to the gate circuit via the low-pass filter.

Meanwhile, the high-pass filter filters out only the pulsvie noise component from the input signal and feeds the noise component to the noise detector where it is amplified and rectified. (See Waveform-2.)

To cope with weak-signal noise, the noise detector is supported with the AGC (Automatic Gain Control) circuit. The noise component from the noise detector output is waveform-shaped by the mono-stable multivibrator. (See

Waveform-3.) The output from the mono-stable multivibrator then couples to the gate circuit as a control-pulse array which is used to cut out only the pulsvie noise component from the audio signal.

The memory provided at where holds the audio signal level constant while the gate circuit is "closed".

The 19 kHz pilot-hold circuit serves to prevent stereo pilot-signal intermission.

The audio signal then sustains high-frequency-phase compensation to compensate for the phase shift due to the low-pass filter, then is coupled to the output terminal.

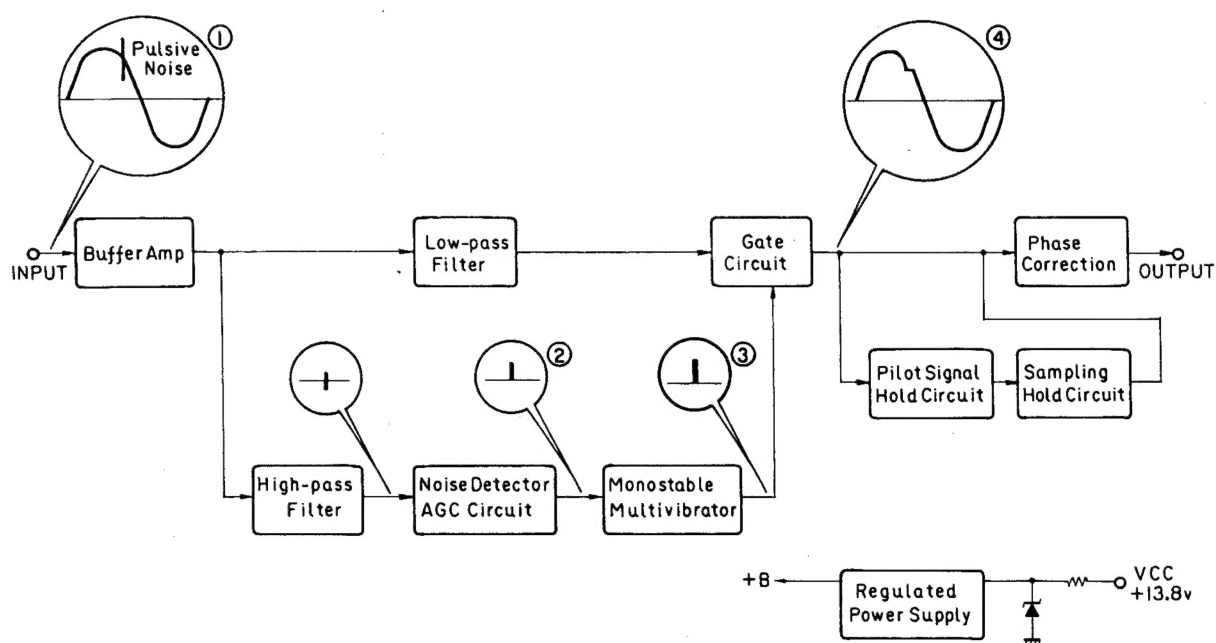


Fig. 6

3. ADJUSTMENT

3.1 FM IF ADJUSTMENT

● Connection Diagram

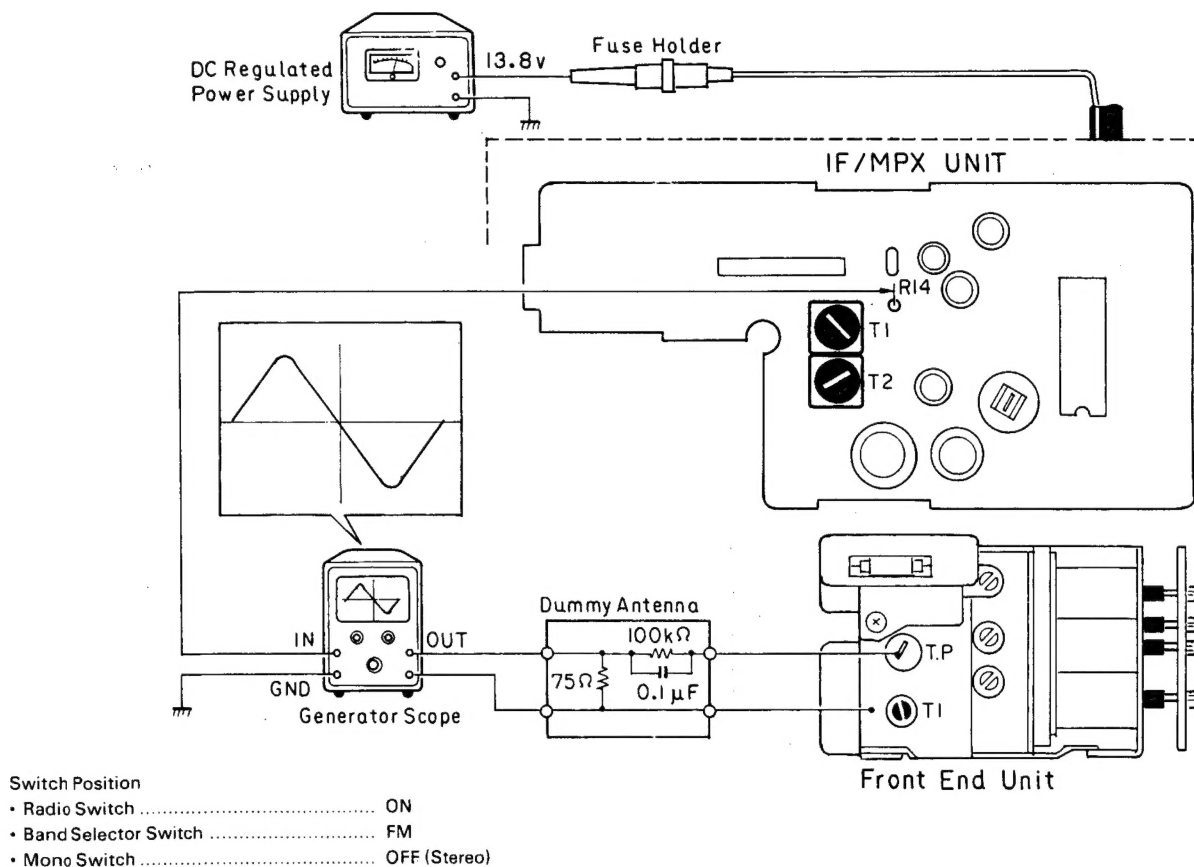


Fig. 7

● To Adjust

- Set Generator Scope as follows:
 Frequency centering on sweep 455 kHz
 Input level 0.3 Vp-p/cm
 Output level 3 mV ~ 10 mV
- Set DC regulated power supply to 13.8V.
- A waveform shown in Fig. 7 is obtained on the generator scope when the hook-up is made as illustrated above and the power source is applied to.
- Adjust the cores of T1 (yellow) and T2 (blue) so that maximum amplitude and optimum linearity are obtained.

NOTE:

The 10.7 MHz marker need not be center positioned on the waveform.

ADJUSTMENT

3.2 FM TRACKING ADJUSTMENT

● Connection Diagram

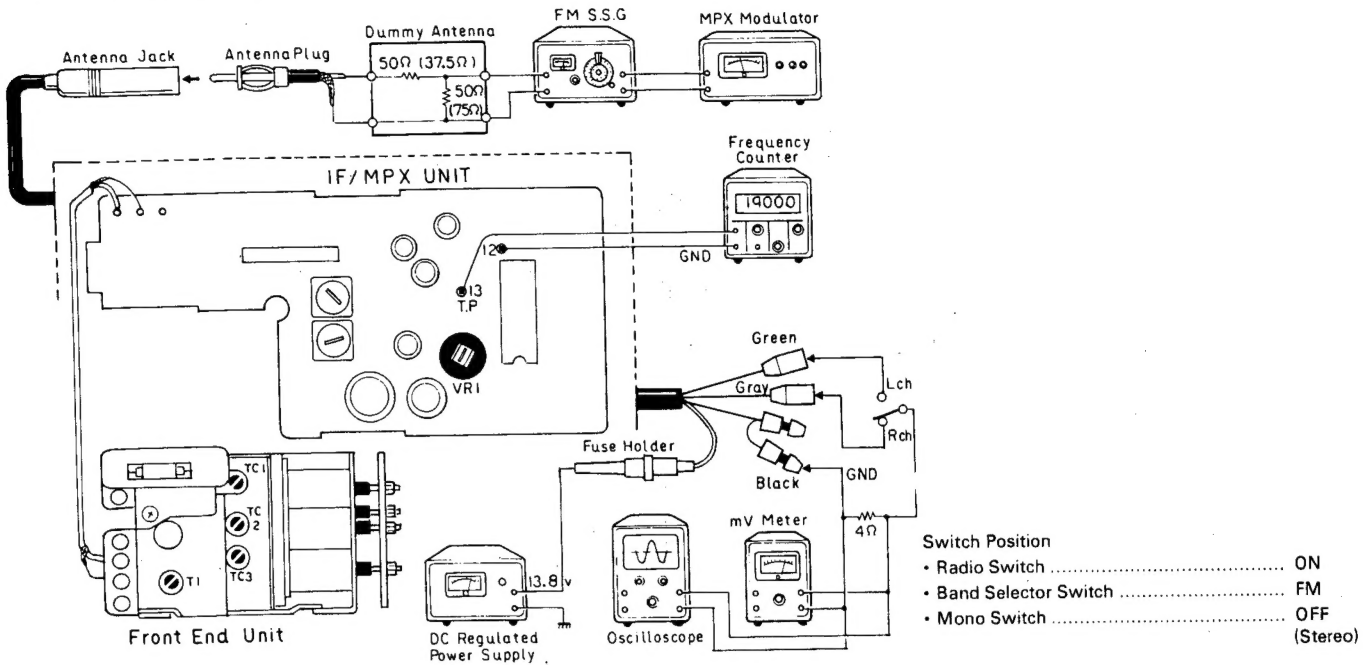


Fig. 8

● To Adjust

In case of KP-3500/U, E

SSG Frequency	Pointer Position	Adjustment Point	Note
1. 87.5 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Minimum	TC3	87.5 MHz can be received
2. 108.5 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Maximum	TC1, TC2	Check if 108.5 MHz can be received
3. 98 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Tuned position		Maximum output

In case of KP-3800/E

SSG Frequency	Pointer Position	Adjustment Point	Note
1. 87.5 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Minimum	TC3	87.5 MHz can be received
2. 104.5 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Maximum	TC1, TC2	Check if 104.5 MHz can be received
3. 98 MHz (400 Hz, 100% modulation), output level 22 dB (μV)	Tuned position		Maximum output

3.3 IF/MPX ADJUSTMENT

● Connection Diagram (Shown in Fig. 8.)

● To Adjust

1. Obtain non-modulation signal by setting SSG output at 60 dB (μV). Adjust VR1 so that the frequency counter indicates 19 kHz ± 30 Hz.
2. Obtain stereo modulation signal by setting SSG output at 60 dB (μV). Adjust VR2 to secure maximum separation.

ADJUSTMENT

3.4 AM IF ADJUSTMENT (KP-3500/U, E)

● Connection Diagram

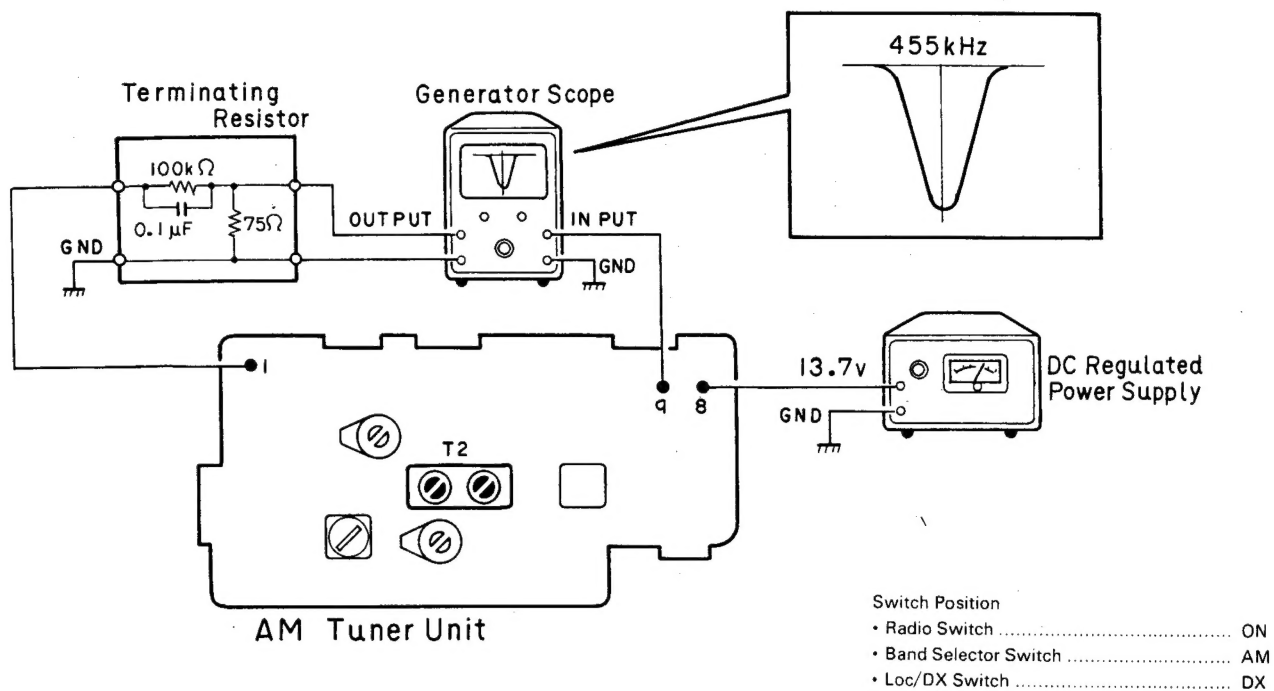


Fig. 9

● To Adjust

1. Set Generator Scope as follows:
 - Frequency centering on sweep 455 kHz
 - Input level 0.3 Vp-p/cm
 - Output level 3 mV ~ 10 mV
2. Turn the cores (red and blue) of T2 and adjust so that U-curve will be at maximum amplitude and best symmetry.

ADJUSTMENT

3.5 AM TRACKING ADJUSTMENT (KP-3500/U, E)

● Connection Diagram

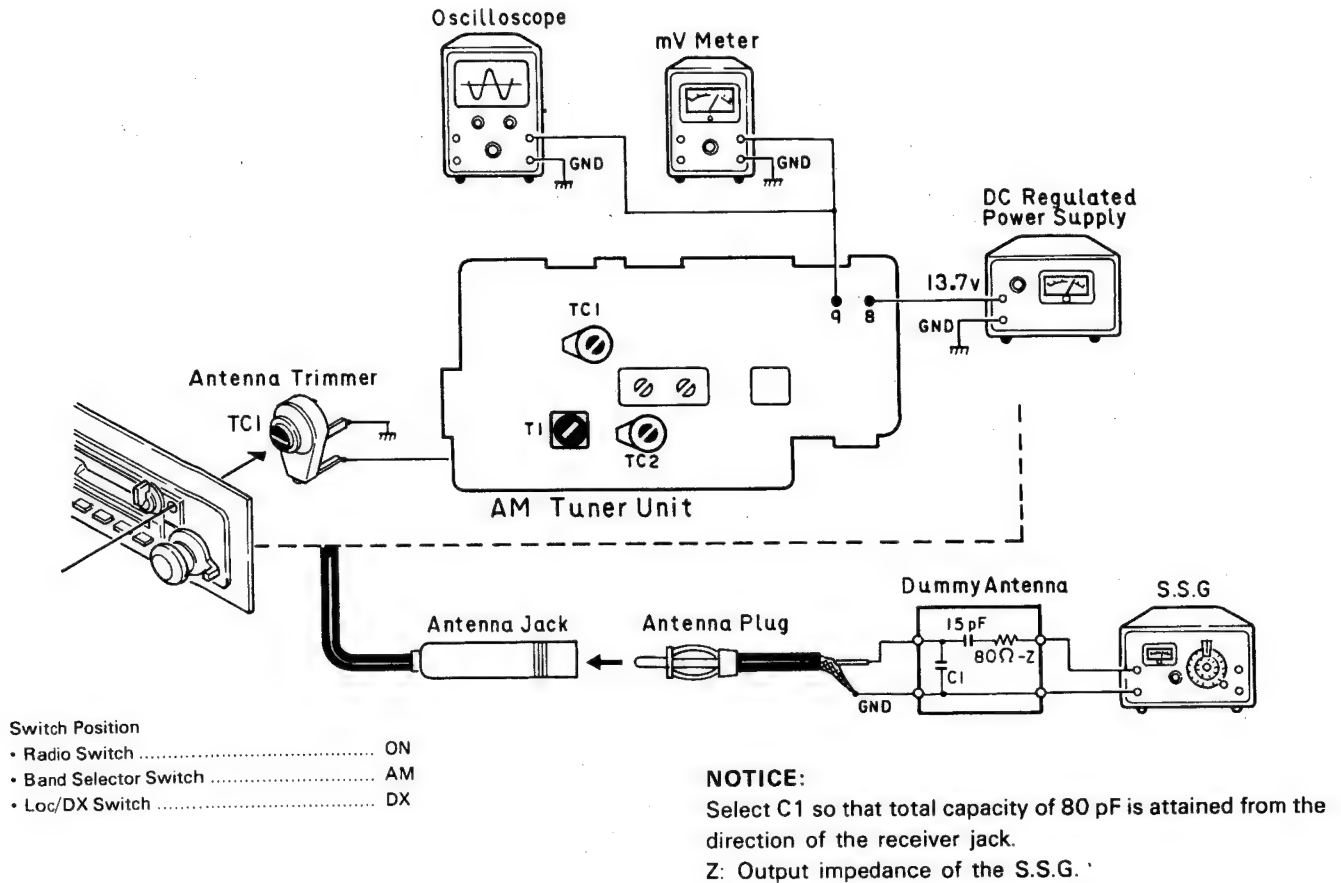


Fig. 10

● To Adjust

SSG Frequency	Pointer Position	Adjustment Point	Note
1. 520 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Minimum	T1	520 kHz can be received
2. 1,660 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Maximum	TC2	1,660 kHz can be received
3. Repeat (1) and (2) alternately and adjust so that broadcast can be received at the frequency between 520 kHz and 1,660 kHz.			
4. 1,000 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Tune to 1,000 kHz	TC1, antenna trimmer (TC1)	mV Meter at maximum

ADJUSTMENT

3.6 MW/LW IF ADJUSTMENT (KP-3800/E)

● Connection Diagram

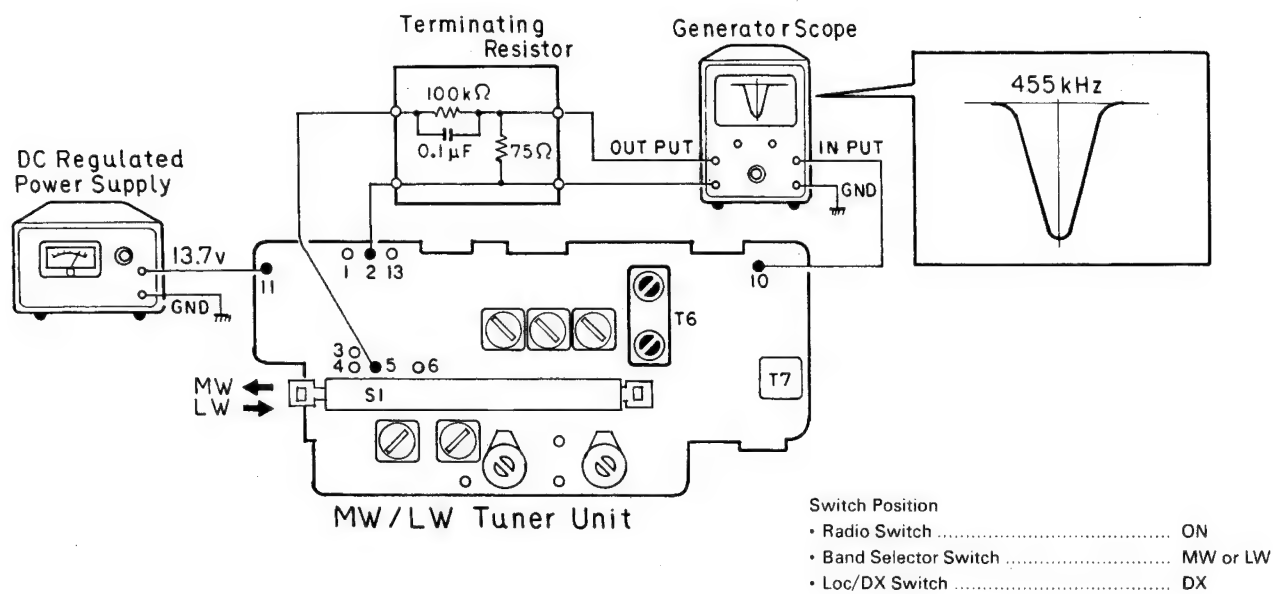


Fig. 11

● To Adjust


1. Set Generator Scope as follows:
 Frequency centering on sweep 455 kHz
 Input level 0.3 V_{p-p}/cm
 Output level 3 mV ~ 10 mV
2. Turn the cores (red and blue) of T6 and adjust so that U-curve will be at maximum amplitude and best symmetry.

ADJUSTMENT

3.7 MW/LW TRACKING ADJUSTMENT (KP-3800/E)

In case of MW

● Connection Diagram

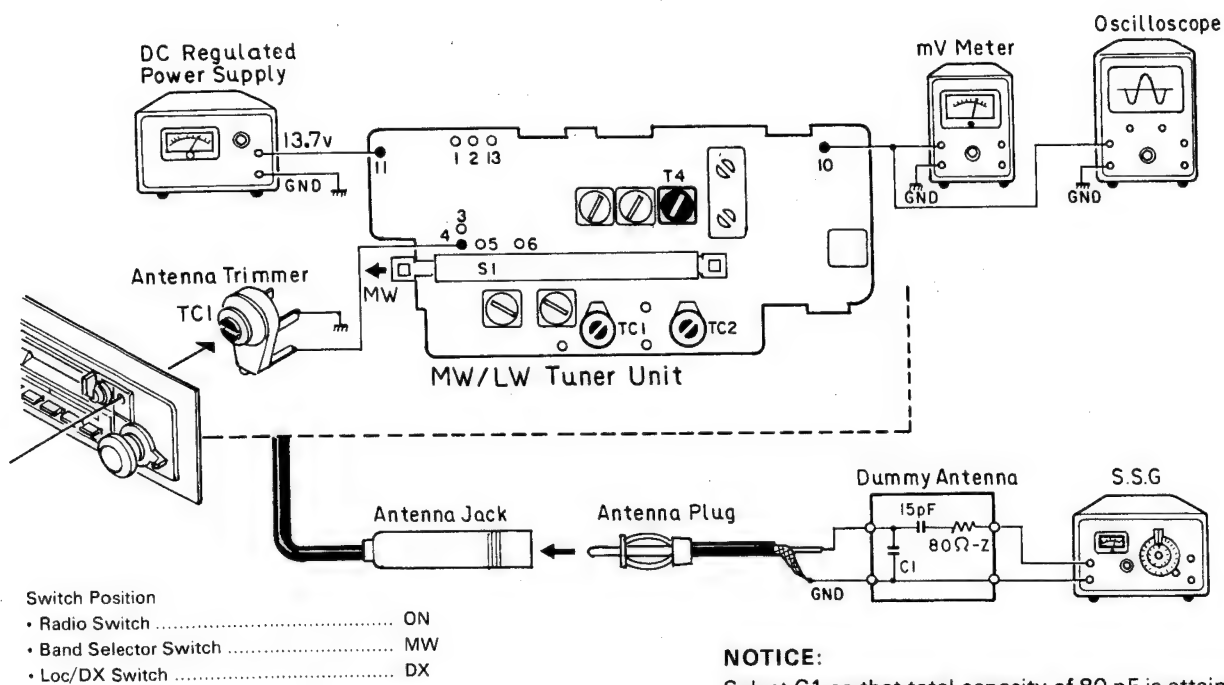

NOTICE:

Select C1 so that total capacity of 80 pF is attained from the direction of the receiver jack.
Z: Output impedance of the S.S.G.

Fig. 12


● To Adjust

S.S.G. Frequency	Pointer Position	Adjustment Point	Note
1. 520 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Minimum	T4	520 kHz can be received
2. 1,660 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Maximum	TC2	1,660 kHz can be received
3. Repeat (1) and (2) alternately and adjust so that broadcast can be received at the frequency between 520 kHz and 1,660 kHz.			
4. 1,000 kHz (400 Hz, 30% modulation), output level 20 dB (μ V)	Tune to 1,000 kHz	TC1, antenna trimmer (TC1)	mV Meter at maximum

ADJUSTMENT

In case of LW

● Connection Diagram

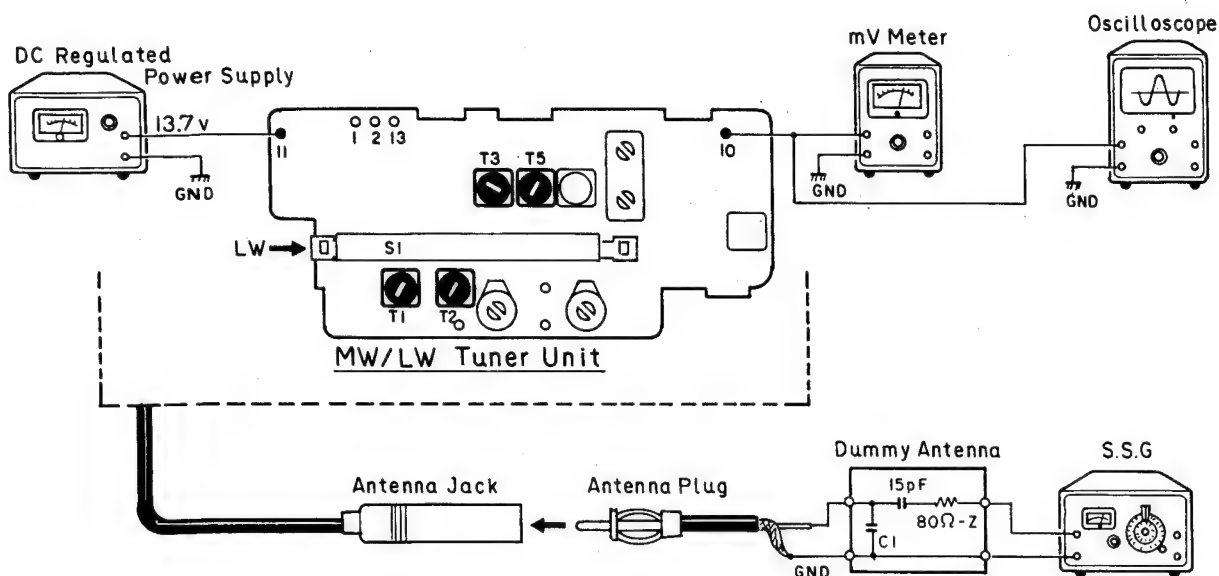

Switch Position

- Radio Switch ON
- Band Selector Switch LW
- Loc/DX Switch DX

NOTICE:

Select C1 so that total capacity of 80 pF is attained from the direction of the receiver jack.

Z: Output impedance of the S.S.G.

Fig. 13

● To Adjust

SSG Frequency	Pointer Position	Adjustment Point	Note
1. 140 kHz (400 Hz, 30% modulation), output level 40 dB (μ V)	Minimum	T5	140 kHz can be received
2. 295 kHz (400 Hz, 30% modulation), output level 40 dB (μ V)	Maximum	T3	295 kHz can be received
3. Repeat (1) and (2) alternately and adjust so that broadcast can be received at the frequency between 140 kHz and 295 kHz.			
4. 215 kHz (400 Hz, 30% modulation), output level 40 dB (μ V)	Tune to 215 kHz	T1, T2	mV Meter at maximum

ADJUSTMENT

3.8 PNS ADJUSTMENT

● Connection Diagram

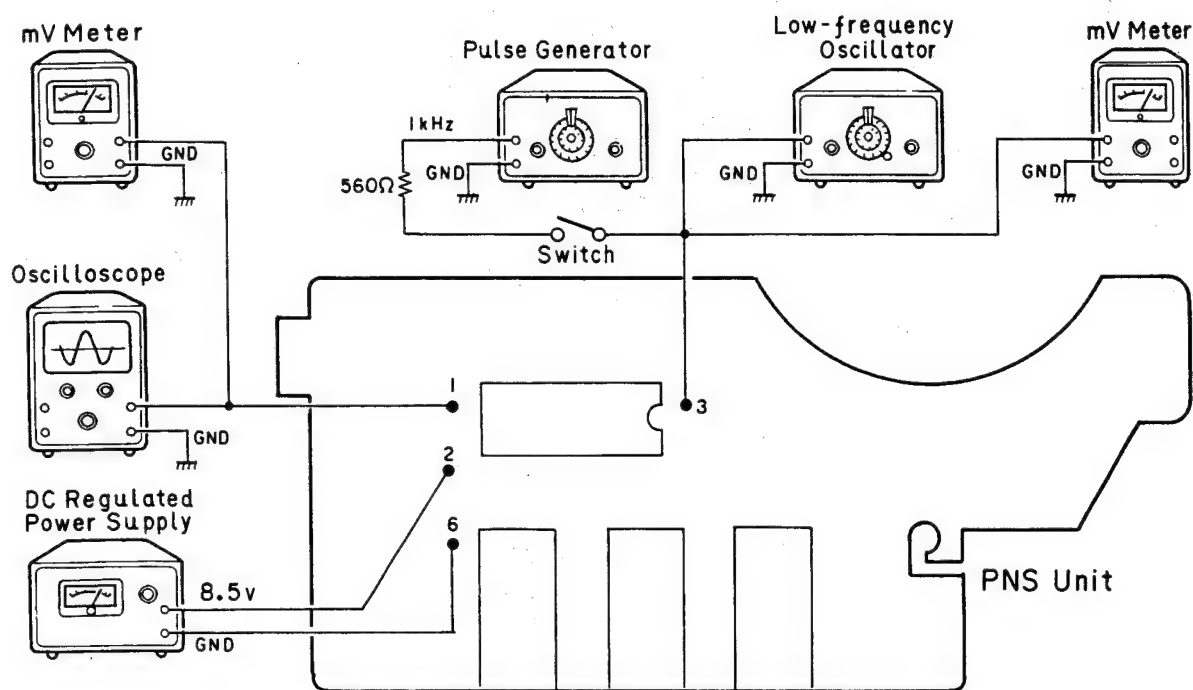


Fig. 14

Switch Position

- Radio Switch ON
- Band Selector Switch FM
- Mono Switch OFF (Stereo)

● Items to be Confirmed

1. Set the AF signal generator output frequency to 1 kHz and its output level to 300 mV, then couple the output to Terminal-1 on the where.
2. Use a mV Meter to check the output voltage on Terminal-2 for $270 \text{ mV}^{+33}_{-29}$ mV.
3. Supplying the 50 kHz signal through the low-frequency oscillator, make sure that the frequency response is more than 50 kHz at 1 kHz for the -4.5 dB . (See Fig. 15.)
4. Turn on the switch, set the pulse generator output frequency, level, and pulse width to 1 kHz, 100 mV, and $1 \mu \text{ sec}$ respectively. Set the AF signal generator output to 1 kHz and 300 mV.
5. Use an oscilloscope to check that the pulse noise component is eliminated from the signal. (See Fig. 16.)

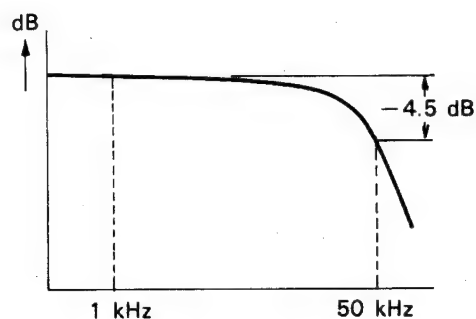


Fig. 15

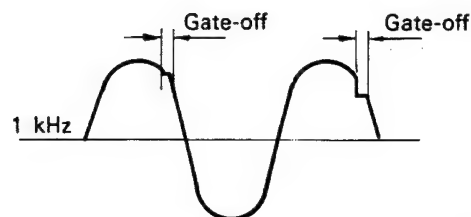


Fig. 16

4. DIAL STRINGING

1. To start dial stringing, remove the cassette mechanism unit at first.
2. Turn the tuning shaft fully to the left (so the core of front end fills up the inside).
3. Take 50 cm length of string (19-5/8 in), and tie it securely to the spring as shown in Fig. 17-1.
4. When dial stringing, follow the numerical sequence and operate securely as there is no looseness on the way.

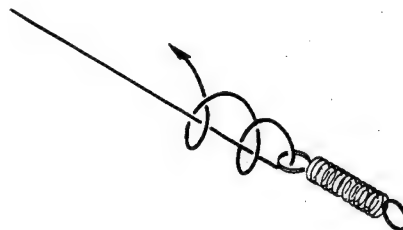


Fig. 17-1

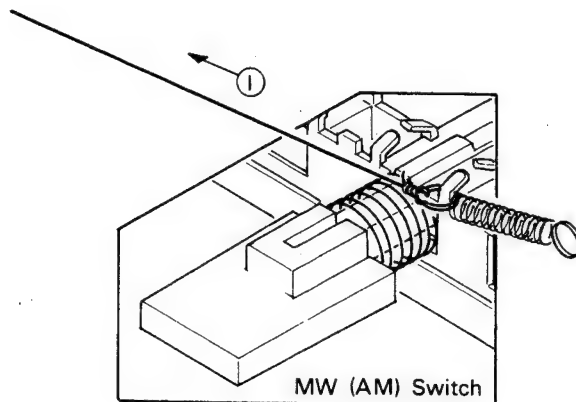


Fig. 17-2

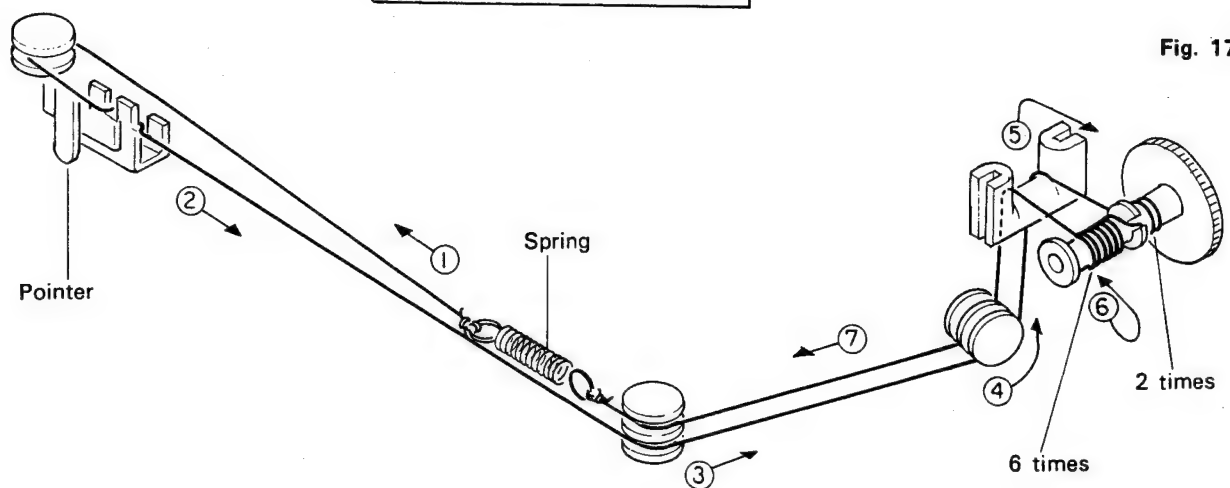


Fig. 17-3

5. SCHEMATIC CIRCUIT DIAGRAM (KP-3500/U, E)

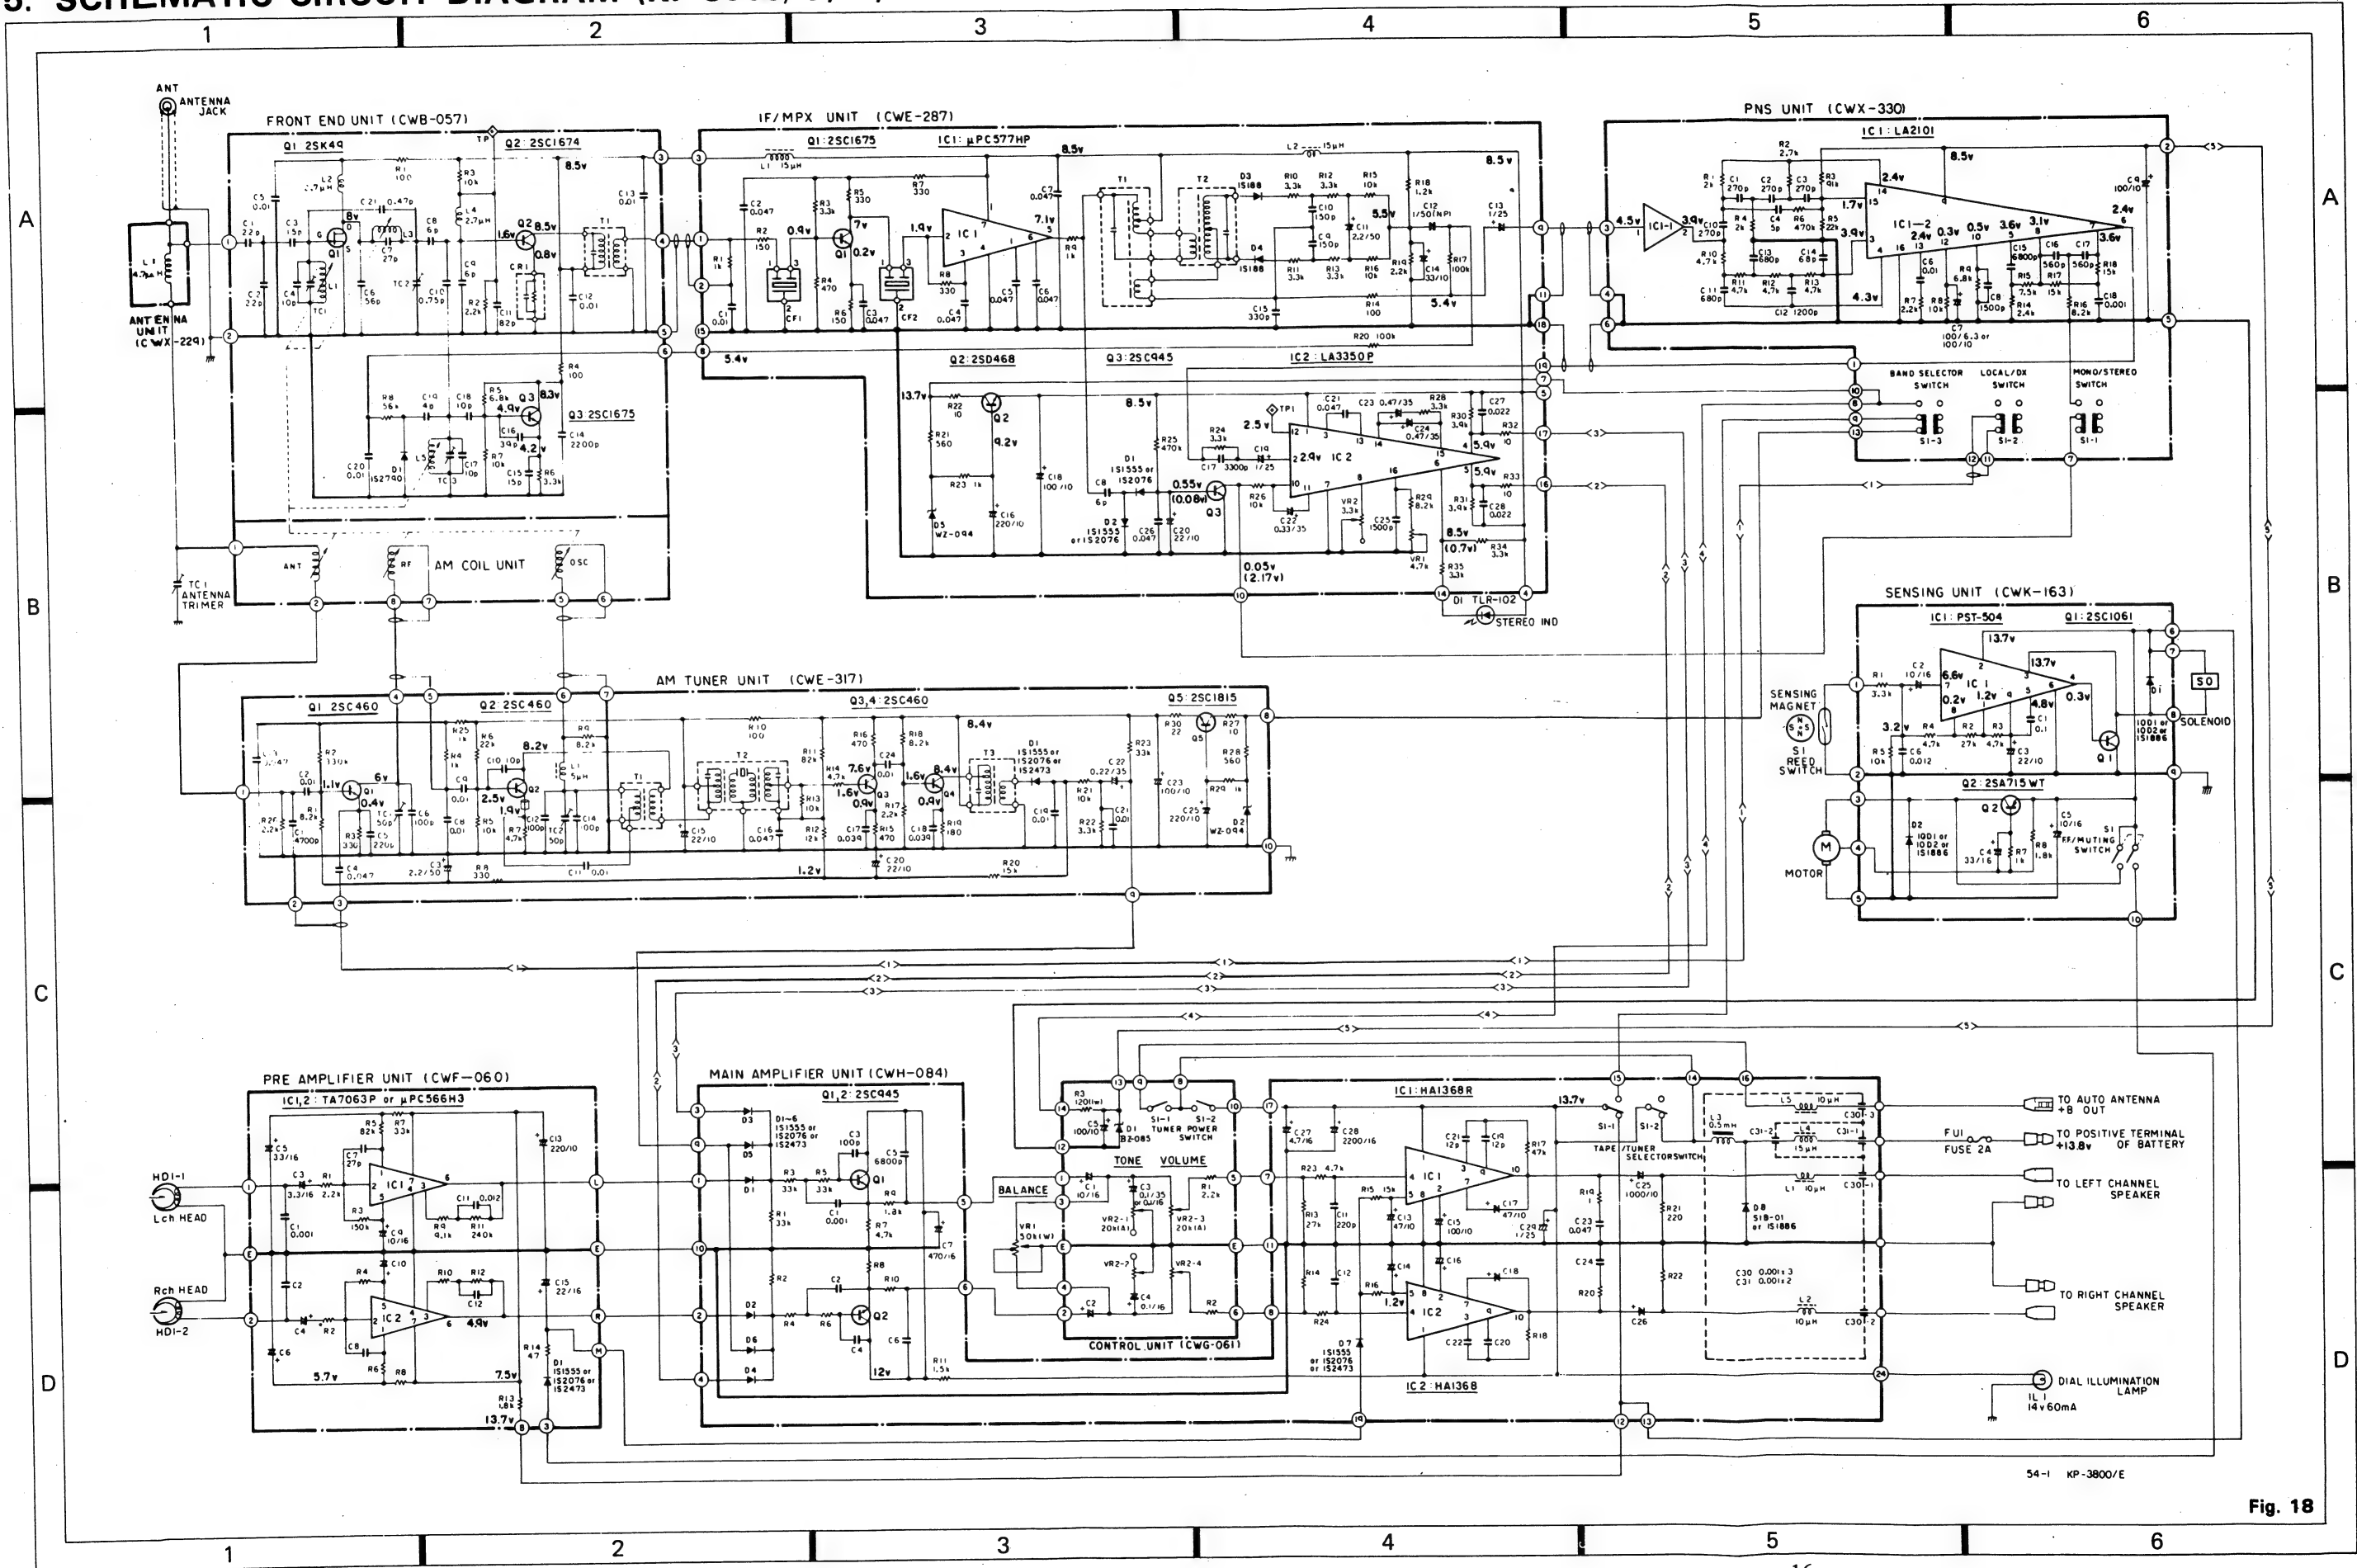


Fig. 18

6. SCHEMATIC CIRCUIT DIAGRAM (KP-3800/E)


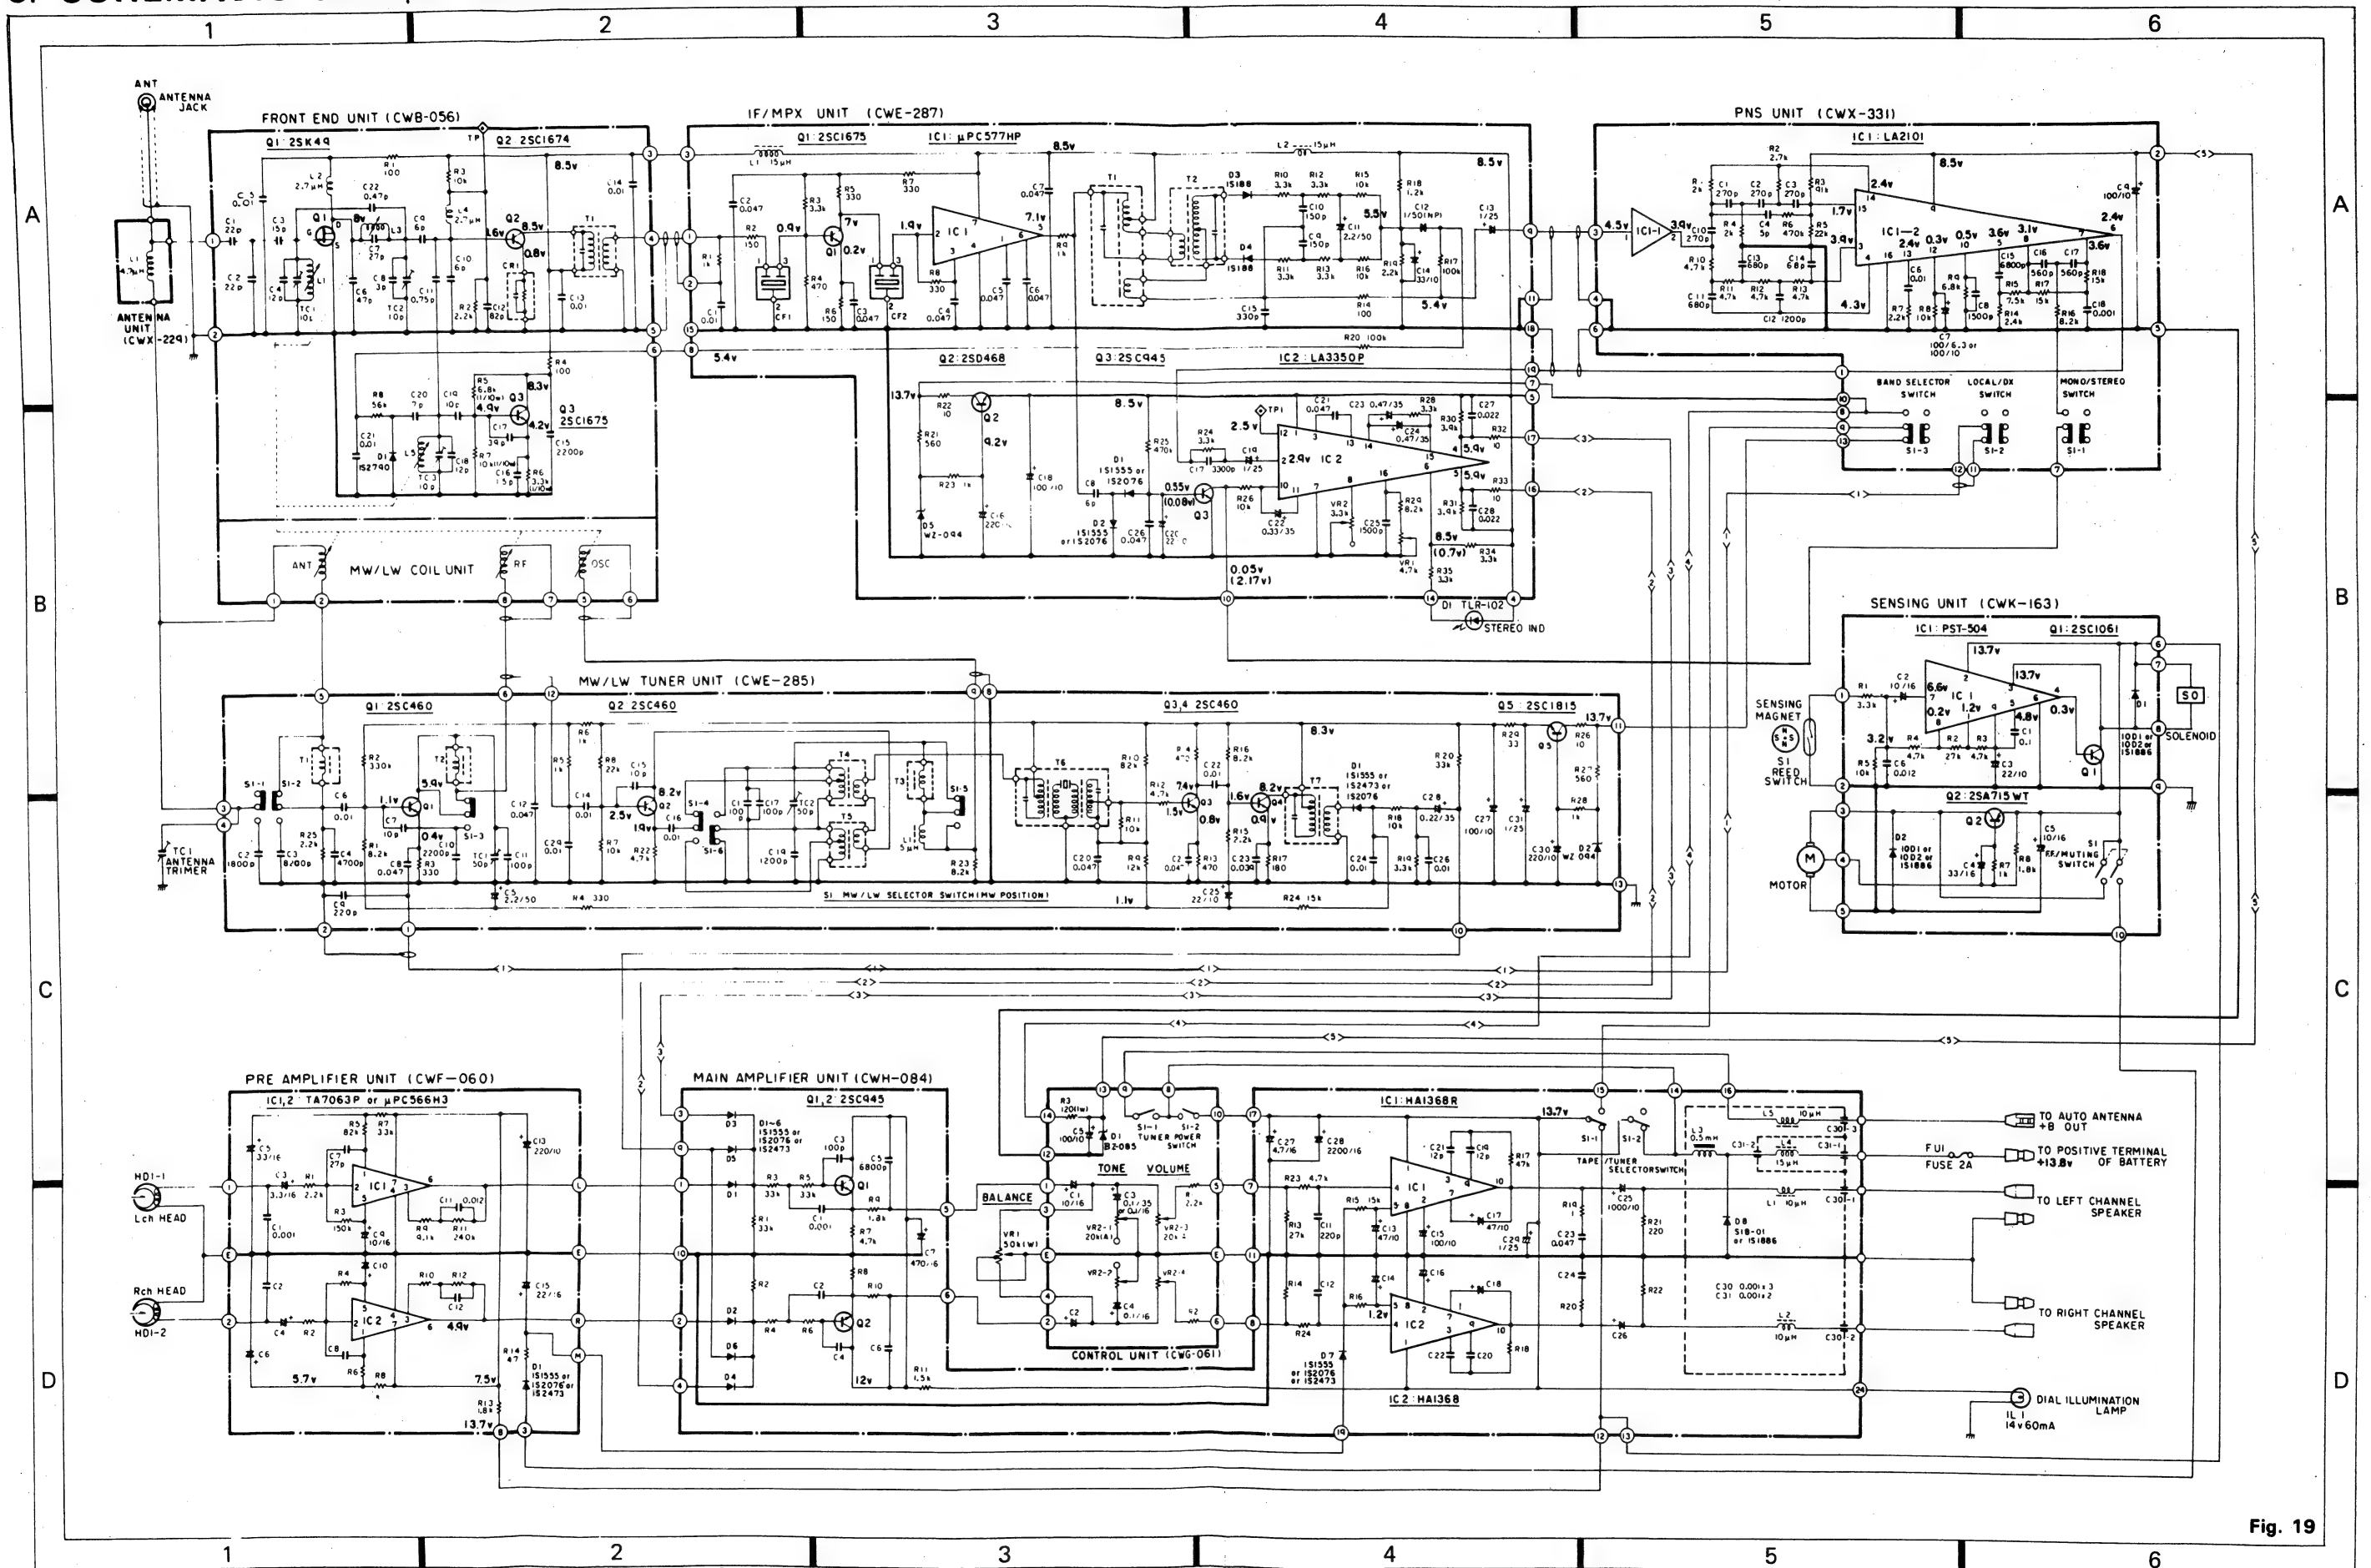


Fig. 19


SCHEMATIC CIRCUIT DIAGRAM

● IC's and Transistors


2SC460




2SC1061




2SC1815
2SC1674
2SC1675
2SC945




2SA715WT




2SK49




2SD468




μPC577HP




LA2101
LA3350P




PST-504




HA1368




HA1368R




TA7063P
μPC566H3




HA1368
HA1368R




TA7063P
μPC566H3




μPC577HP

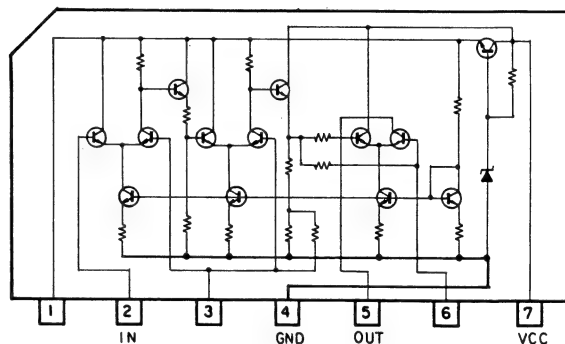


PST-504

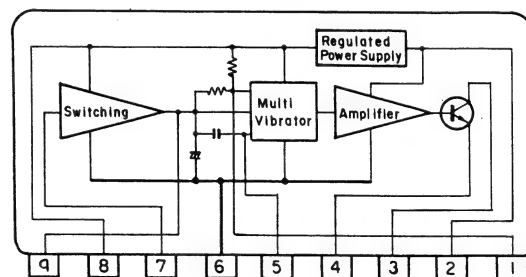

LA3350P

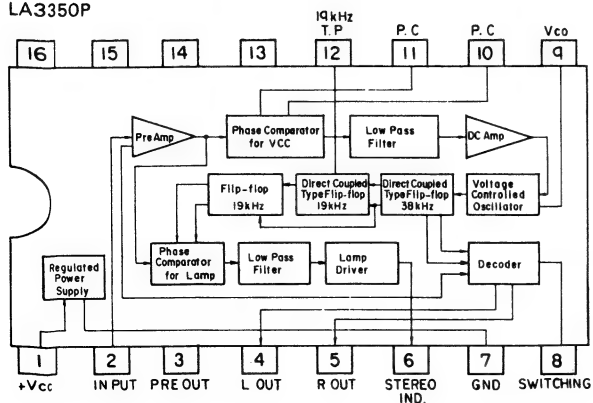

LA2101

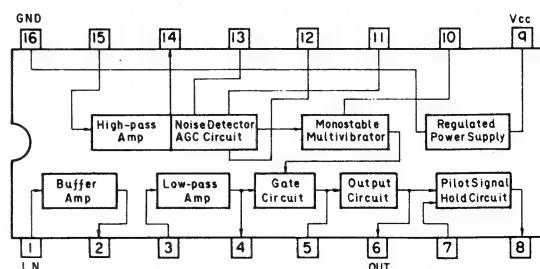

7. AM TUNER UNIT (CWE-317) (KP-3500/U, E)

● Parts Connection

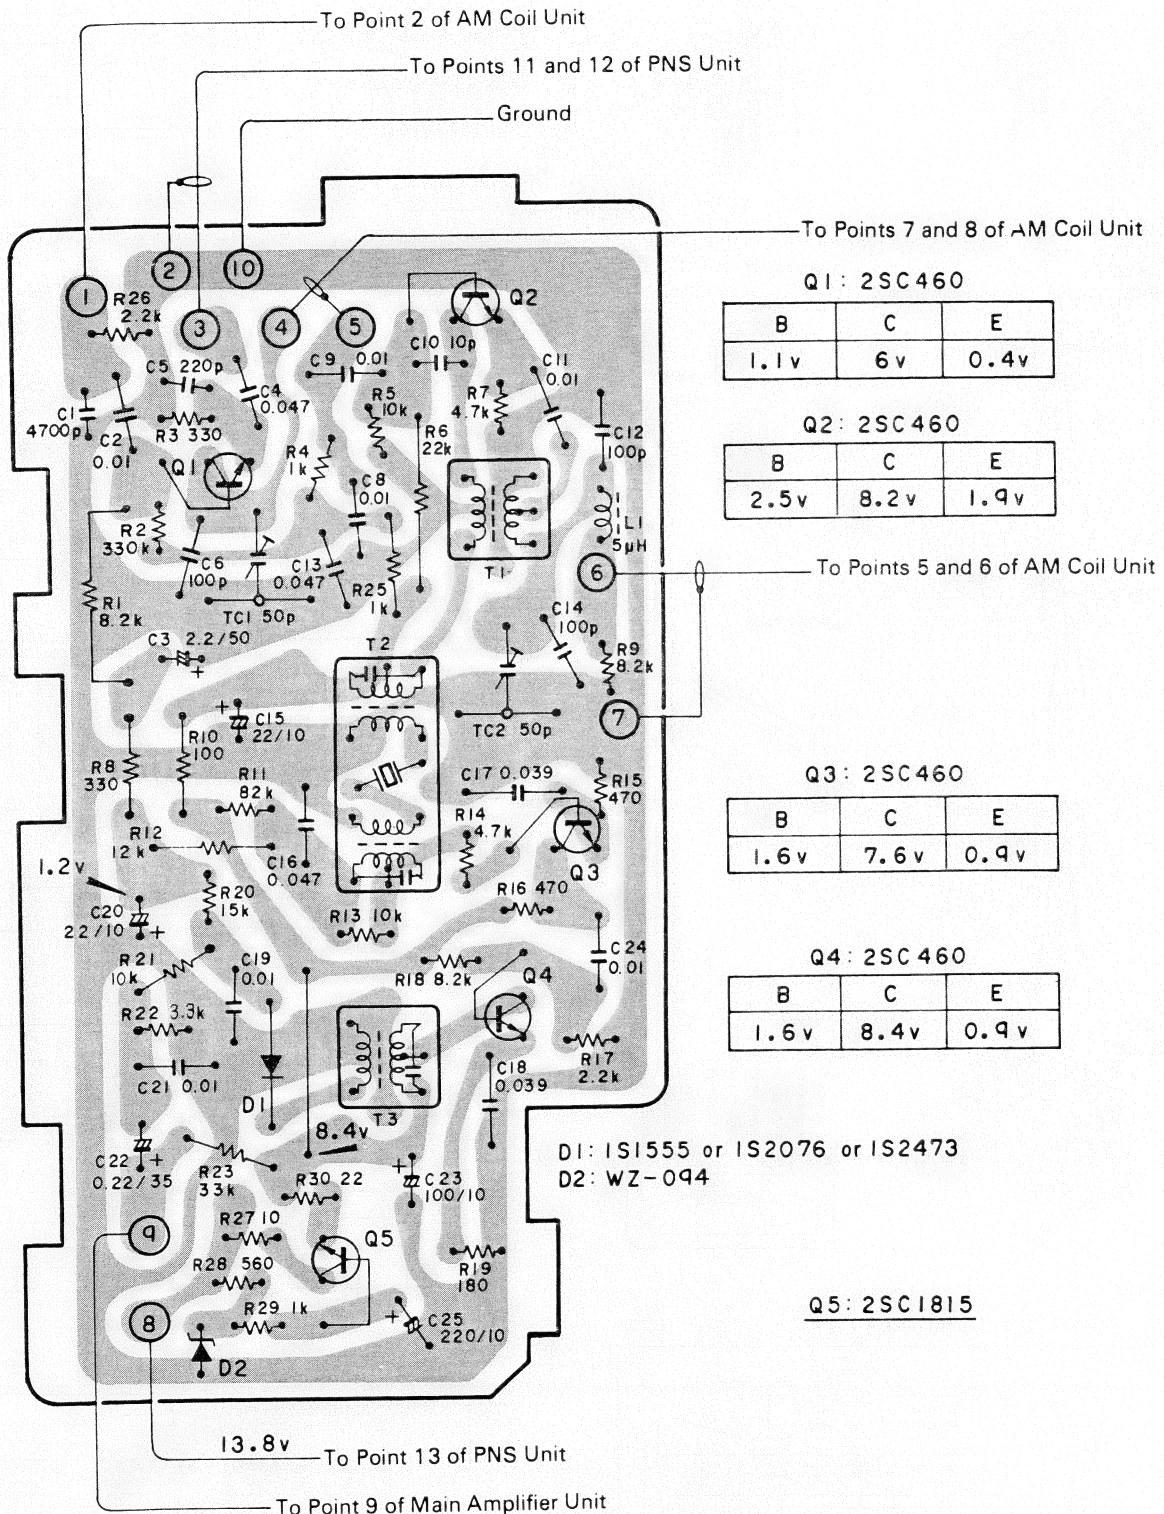


Fig. 20

AM TUNER UNIT (CWE-317) (KP-3500/U, E)

● Parts List

NOTE:
When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex. 1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J = 5%, and K = 10%).
560Ω 56×10¹ 561..... RD1/4PS 561 J
47kΩ 47×10³ 473..... RD1/4PS 473 J
0.5Ω 0R5 RN2H 0R5 K
1Ω 010..... RS1P 010 K

Ex. 2 When there are 3 effective digits (such as in high precision metal film resistors).
5.62kΩ 562×10¹ RN1/4SR 5621 F

MISCELLANEOUS

Part No.	Symbol & Description	
2SC460-A	Q1, Q3, Q4	
2SC460-B	Q2	
2SC1815	Q5	
1S1555 or	D1	
1S2473 or		
1S2076		
WZ-094	U2	
CTE-002	T1	Coil
CTE-037	T2	IF Transformer
CTE-038	T3	IF Transformer
CTF-005	L1	Ferri-Inductor, 5μH
C43-610	TC1, TC2	Ceramic Trimmer, 50pF
CTX-022	Beaded Core	

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/8PS□□□J	R1, R6, R22
RD1/8VS□□□J	R2 – R5, R7 – R21, R23, R25 – R30
VACANT	R24

CAPACITORS

Part No.	Symbol & Description
CQMA 472J 50	C1
CCG-019	C2, C9, C11, C24 0.01μF/50V
CEA 2R2P 50	C3
CKDYF 473Z 25	C4, C13, C16
CKDYB 221K 50	C5
CCDSL 101K 50	C6
VACANT	C7
CQMA 103J 50	C8
CCDSL 100F 50	C10
CCDLH 101K 50L	C12, C14
CEA 220P 10	C15, C20
CQMA 393M 50	C17, C18
CQMA 103K 50	C19, C21
CSZA R22M 35	C22
CEA 101P 10	C23
CEA 221M 10L	C25

8. MW/LW TUNER UNIT (CWE-285) (KP-3800/E)

● Parts Connection

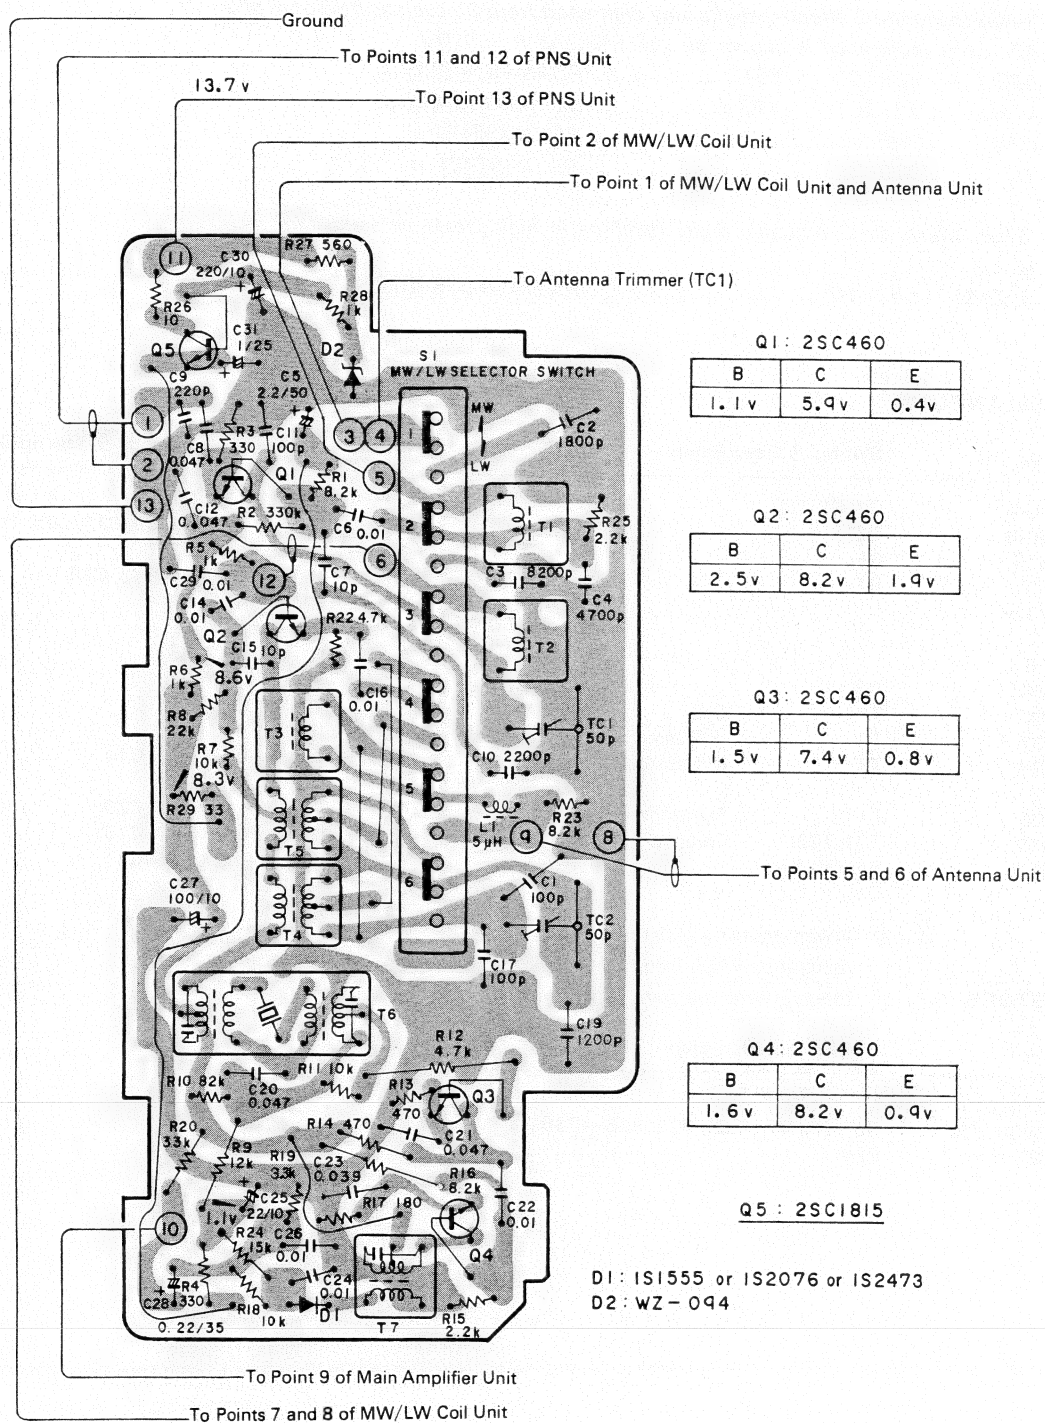


Fig. 21

MW/LW TUNER UNIT (CWE-285) (KP-3800/E)

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description	
2SC460-A	Q1, Q3, Q4	
2SC460-B	Q2	
2SC1815	Q5	
1S1555 or 1S2473 or	D1	
1S2076		
WZ-094	D2	
CTE-058	T1, T2	Coil
CTE-025	T3	Coil
CTE-002	T4	Coil
CTE-024	T5	Coil
CTE-037	T6	IF Transformer
CTE-038	T7	IF Transformer
CTF-005	L1	Ferri-Inductor, 5μH
CSH-041	S1	Switch
C43-610	TC1, TC2	Ceramic Trimmer, 50pF

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/8VS□□□J	R1—R11, R13—R17, R19, R20, R22—R29
RD1/8PS□□□J	R12, R18
VACANT	R21

CAPACITORS

Part No.	Symbol & Description
CCDLH 101K 50 L	C1, C17
CQSAH 182J 50	C2
CQMA 822J 50	C3
CQMA 472J 50	C4
CEA 2R2P 50	C5
CCG-019	C6, C14, C16, C22, C29 0.01μF/50V
CCDSL 100F 50	C7, C15
CKDYF 473Z 25	C8, C12, C20, C21
CKDYB 221K 50	C9
CQMA 222J 50	C10
CCDSL 101K 50	C11
VACANT	C13, C18
CQSAH 122J 50	C19
CQMA 393M 50	C23
CQMA 103K 50	C24, C26
CEA 220P 10	C25
CEA 101P 10	C27
CSZA R22M 35	C28
CEA 221M 10 L	C30
CSZA 1R0M 25	C31

9. CONTROL UNIT (CWG-061)

● Parts Connection

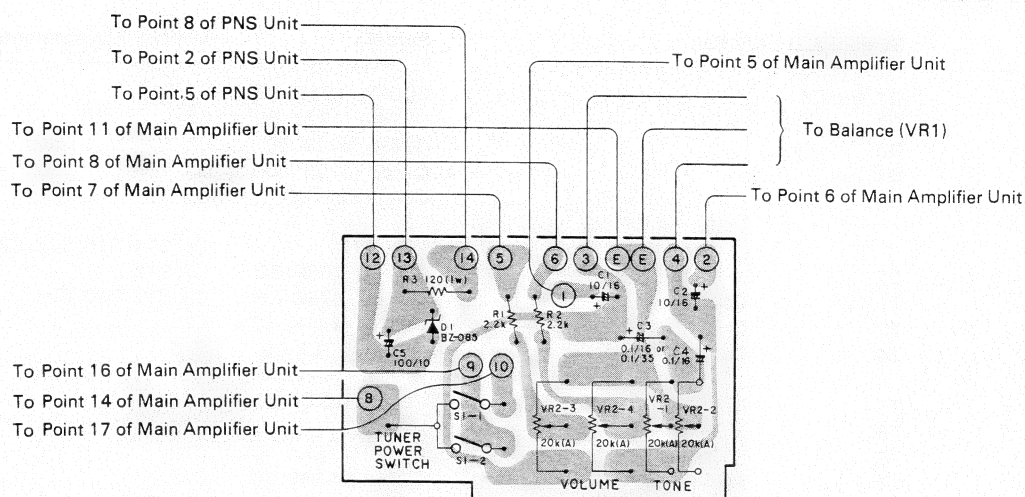


Fig. 22

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description
BZ-085	D1
CCS-212	VR2 Volume/Switch

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/8VS□□□J	R1, R2
RS1P□□□J	R3

CAPACITORS

Part No.	Symbol & Description
CEA 100P 16	C1, C2
CSYA 0R1M 16 or	C3
CSZA 0R1M 35	
CSYA 0R1M 16	C4
CEA 101M 10 L	C5

10. PNS UNIT(CWX-330)(KP-3500/U, E),(CWX-331)(KP-3800/E)

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description
LA2101	IC1
LSG-087	S1 Switch (KP-3800/E)
CSG-088	S1 Switch (KP-3500/U, E)

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/8PS□□□J	R1 — R18

CAPACITORS

Part No.	Symbol & Description
CKDSA 271J 50	C1 — C3, C10
CCDSL 050D 50	C4
VACANT	C5
CQMA 103K 50	C6
CEA 101M 10 L or	C7
CEA 101M 6R3 L	
CQMA 152J 50	C8
CEA 101M 10 L	C9
CKDSA 681J 50	C11, C13
CQMA 122J 50	C12
CKDSA 680J 50	C14
CQMA 682K 50	C15
CKDSA 561J 50	C16, C17
CKDSA 102J 50	C18

PNS UNIT (CWX-330) (KP-3500/U, E), (CWX-331) (KP-3800/E)

● Parts Connection

To Points 2 and 3 of AM Tuner Unit (KP-3500/U, E)
 To Points 1 and 2 of MW/LW Tuner Unit (KP-3800/E)
 To Point 8 of AM Tuner Unit (KP-3500/U, E)
 To Point 11 of MW/LW Tuner Unit (KP-3800/E)

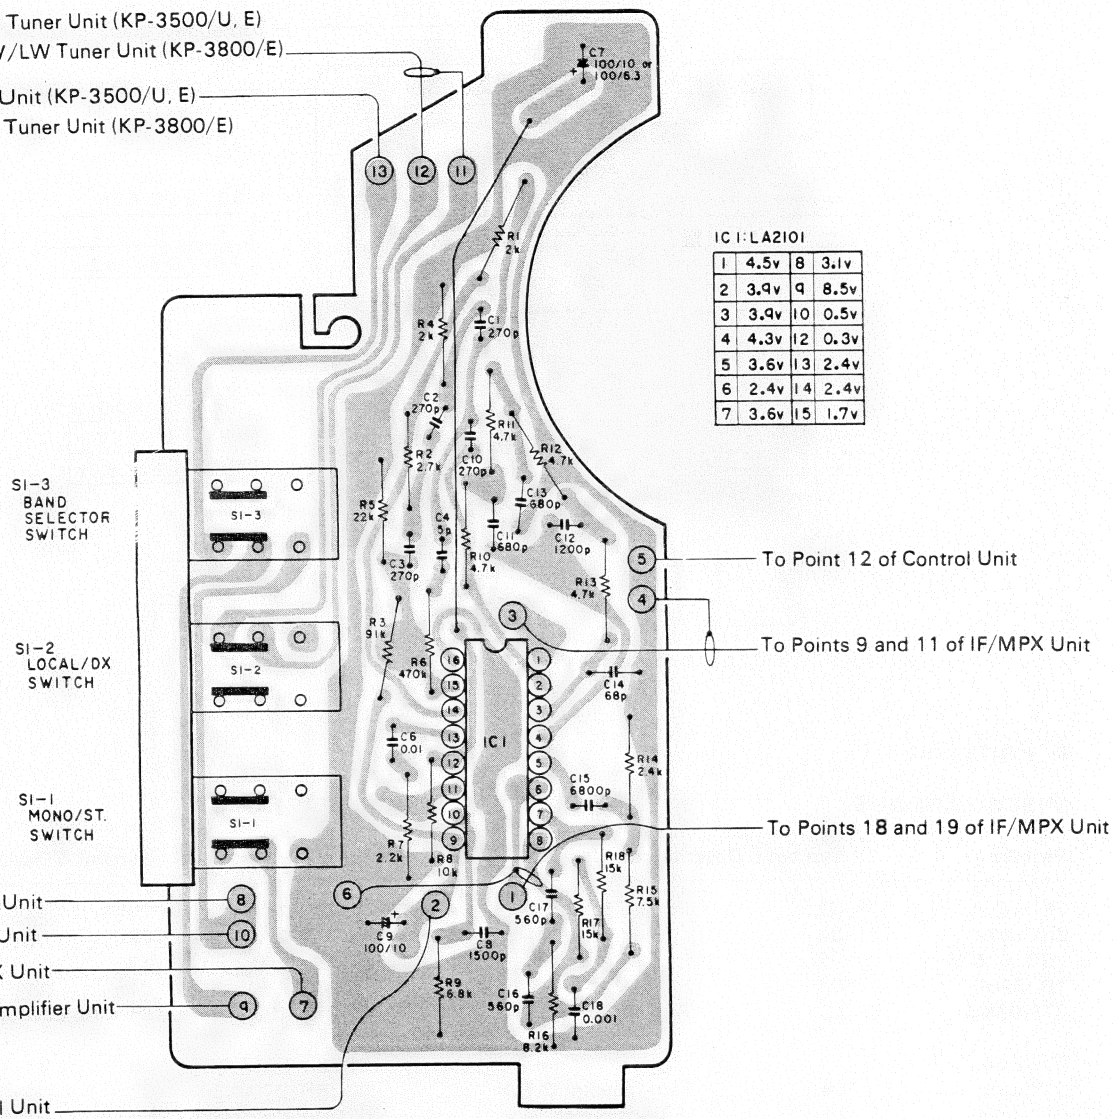


Fig. 23

11. FRONT END UNIT (CWB-057) (KP-3500/U, E)

● Parts Connection

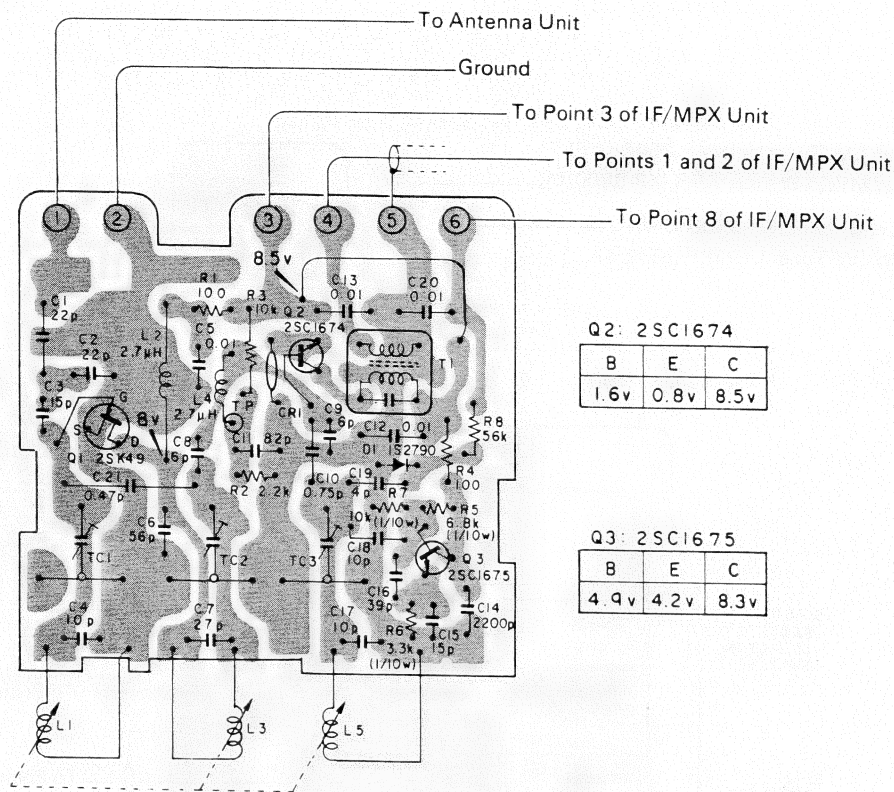


Fig. 24

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description	
2SK49-H2	Q1	
2SC1674	Q2	
2SC1675-M	Q3	
1S2790	D1	
CTF-039 or	L2	Ferri-Inductor, 2.7 μ H
CTF-065		
CTF-039	L4	Ferri-Inductor, 2.7 μ H
CTC-043	T1	IF Transformer
CCG-008	TC1 – TC3	Ceramic Trimmer, 10pF
CCX-001	CR1	Multiple Components

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description	
RD1/8VS□□□J	R1 – R4, R8	
RD1/10VS□□□J	R5 – R7	

CAPACITORS

Part No.	Symbol & Description	
CCDSL 220K 500	C1	
CCDSL 220J 50	C2	
CCDSL 150J 50	C3	
CCDRH 100F 50	C4	
CKDYF 103Z 25	C5, C13, C20	
CCDSL 560J 50	C6	
CCDRH 270J 50	C7	
CCDCH 060D 50	C8, C9	
CGB R75K 500	C10	
CCDSL 820J 50	C11	
CKDYD 103M 50	C12	
CKDYB 222K 50	C14	
CCDTH 150J 50	C15	
CCDTH 390J 50	C16	
CCDTH 100F 50	C17, C18	
CCDCH 040D 50	C19	
CGB R47K 500	C21	

12. FRONT END UNIT (CWB-056) (KP-3800/E)

● Parts Connection

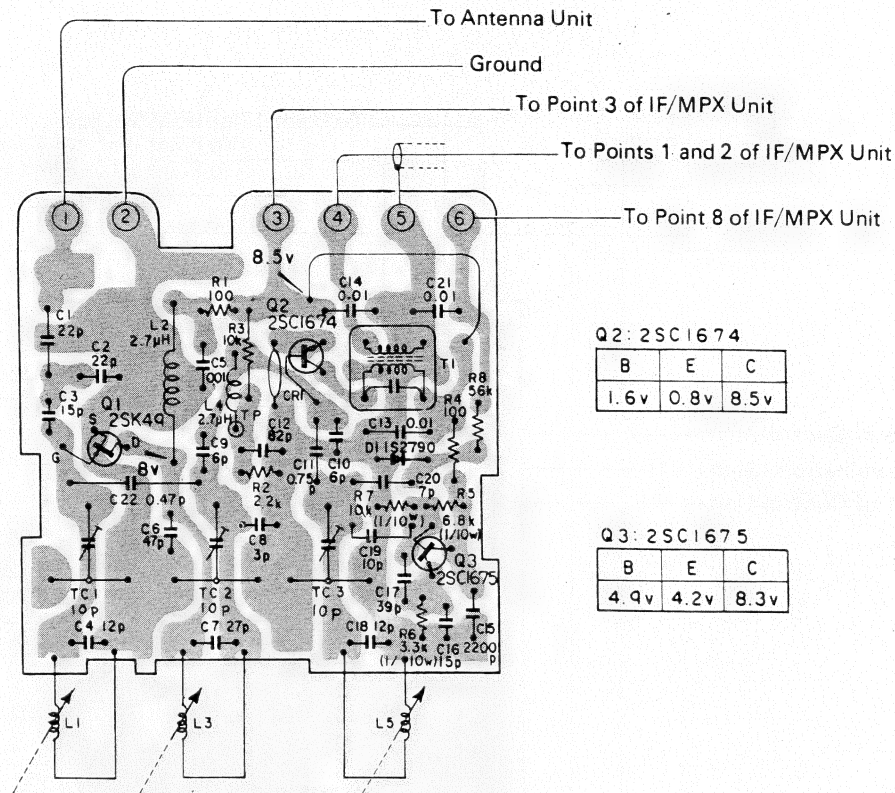


Fig. 25

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description
2SK49-H1	Q1
2SC1674	Q2
2SC1675-M	Q3
1S2790	D1
CTF-039 or	L2 Ferri-Inductor, 2.7 μ H
CTF-065	
CTF-039	L4 Ferri-Inductor, 2.7 μ H
CTC-043	T1 IF Transformer
CCG-008	TC1—TC3 Ceramic Trimmer, 10pF
CCX-001	CR1 Multiple Components

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/8VS□□□J	R1—R4, R8
RD1/10VS□□□J	R5—R7

CAPACITORS

Part No.	Symbol & Description
CCDSL 220K 50	C1
CCDSL 220J 50	C2
CCDSL 150J 50	C3
CCDPH 120J 50	C4
CKDYF 103Z 25	C5, C14, C21
CCDSL 470J 50	C6
CCDRH 270J 50	C7
CCDCH 030C 50	C8
CCDCH 060D 50	C9, 10
CGB R27K 500	C11
CCDSL 820J 50	C12
CKDYD 103M 50	C13
CKDYB 222K 50	C15
CCDTH 150J 50	C16
CCDTH 390J 50	C17
CCDRH 120J 50	C18
CCDTH 100F 50	C19
CCDCH 070D 50	C20
CGB R47K 500	C22

13. MAIN AMPLIFIER UNIT (CWH-084)

● Parts Connection

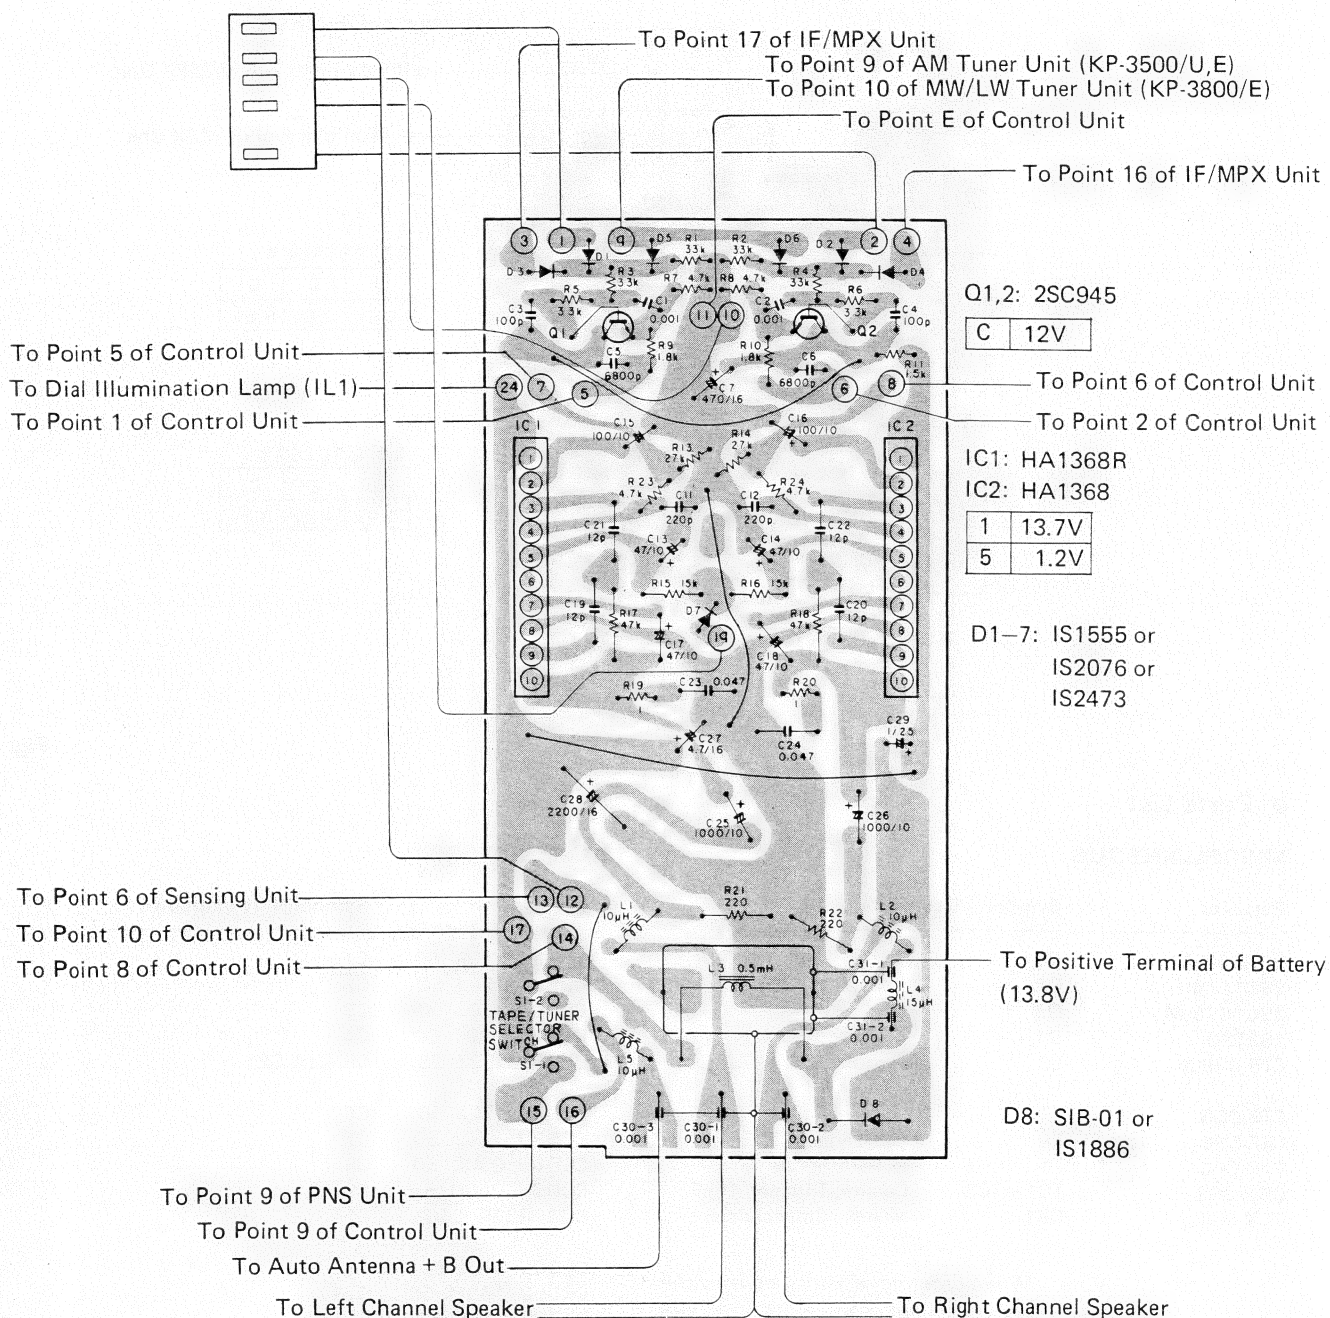


Fig. 26

MAIN AMPLIFIER UNIT (CWH-084)

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description	
HA1368R	IC1	
HA1368	IC2	
2SC945	Q1, Q2	
1S1555 or	D1—D7	
1S2076 or		
1S2473		
SIB-01 or	D8	
1S1886		
CTH-035	L1, L2, L5	Coil, 10 μ F
CTH-018	L3	Coil, 0.5mH
CTF-003	L4	Coil, 15 μ H
CSL-003	S1	Tape/Tuner Selector Switch

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/4VS□□□J	R1—R11, R13—R24
VACANT	R12

CAPACITORS

Part No.	Symbol & Description	
CQMA 102J 50	C1, C2	
CKDYB 101K 50	C3, C4	
CQMA 682J 50	C5, C6	
CEA 471P 16 L	C7	
VACANT	C8—C10	
CKDYB 221K 50	C11, C12	
CEA 470P 10	C13, C14, C17, C18	
CEA 101P 10	C15, C16	
CCPVSL 120J 50	C19—C22	
CQMA 473K 50	C23, C24	
CCH-022	C25, C26	1000 μ F/10V
CSZA 4R7M 16	C27	
CCH-032	C28	2200 μ F/16V
CSZA 010M 25	C29	
CCL-050	C30	Feed through Cap., 0.001 μ F \times 3
CCL-051	C31	Feed through Cap., 0.001 μ F \times 2

14. PRE AMPLIFIER UNIT (CWF-060)

● Parts Connection

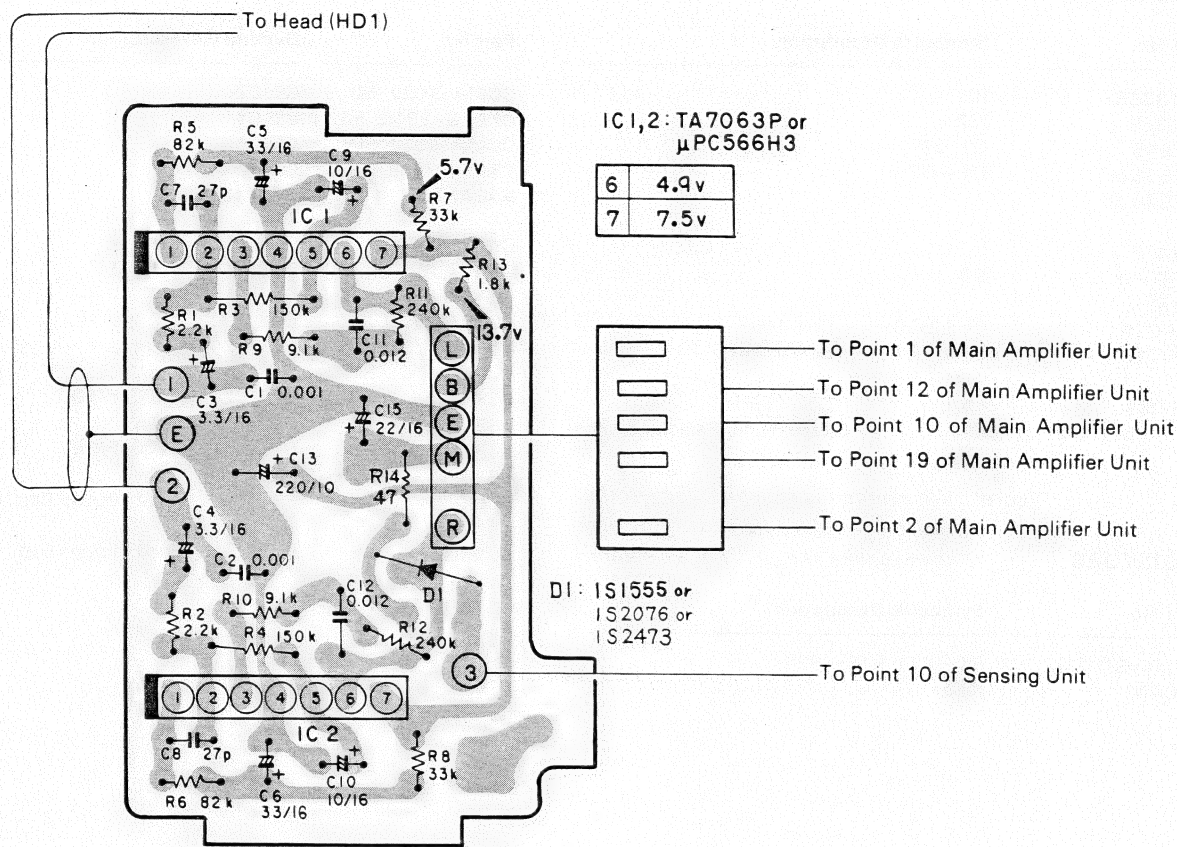


Fig. 27

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description
TA7063P or μ PC566H3	IC1, IC2
1S1555 or 1S2076 or 1S2473	D1

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/4VS□□□J	R1 - R14

CAPACITORS

Part No.	Symbol & Description
CQMA 102K 50	C1, C2
CSZA 3R3M 16	C3, C4
CEA 330P 16 L	C5, C6
CCDSL 270K 50	C7, C8
CEA 100P 16	C9, C10
CQMA 123K 50	C11, C12
CCH-028	C13
VACANT	C14
CEA 220P 16	C15

220 μ F/10V

15. SENSING UNIT (CWK-163)

● Parts Connection

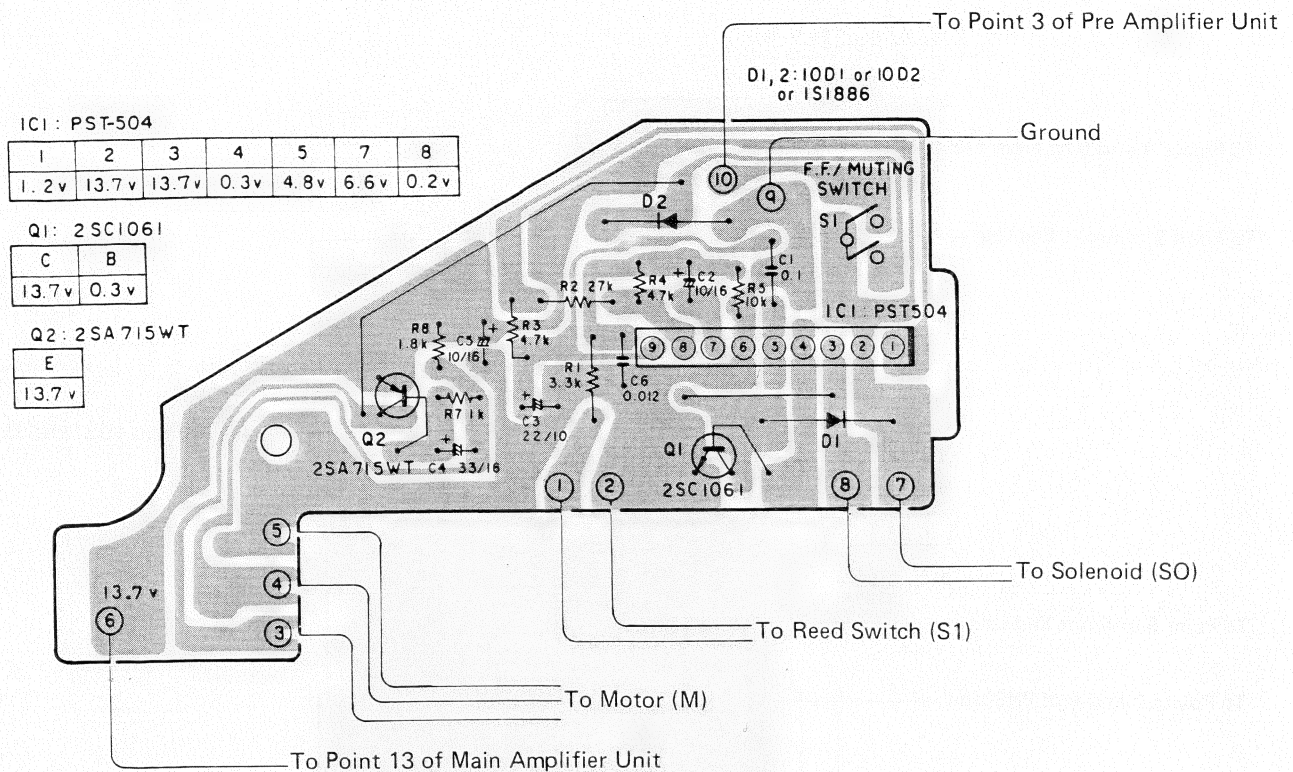


Fig. 28

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description	
PST-504	IC1	
2SC1061	Q1	
2SA715WT	Q2	
10D1 or 10D2 or	D1, D2	
1S1886		
CSN-Q47	S1	F.F./Muting Switch

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description
RD1/4VS□□□□	R1 — R5, R7, R8
VACANT	R6

CAPACITORS

Part No.	Symbol & Description	
CCG-005	C1	0.1 μ F/12V
CEA 100P 16	C2, C5	
CEA 220P 10	C3	
CEA 330P 16	C4	
CQMA 123M 50	C6	

16. IF/MPX UNIT (CWE-287)

● Parts Connection

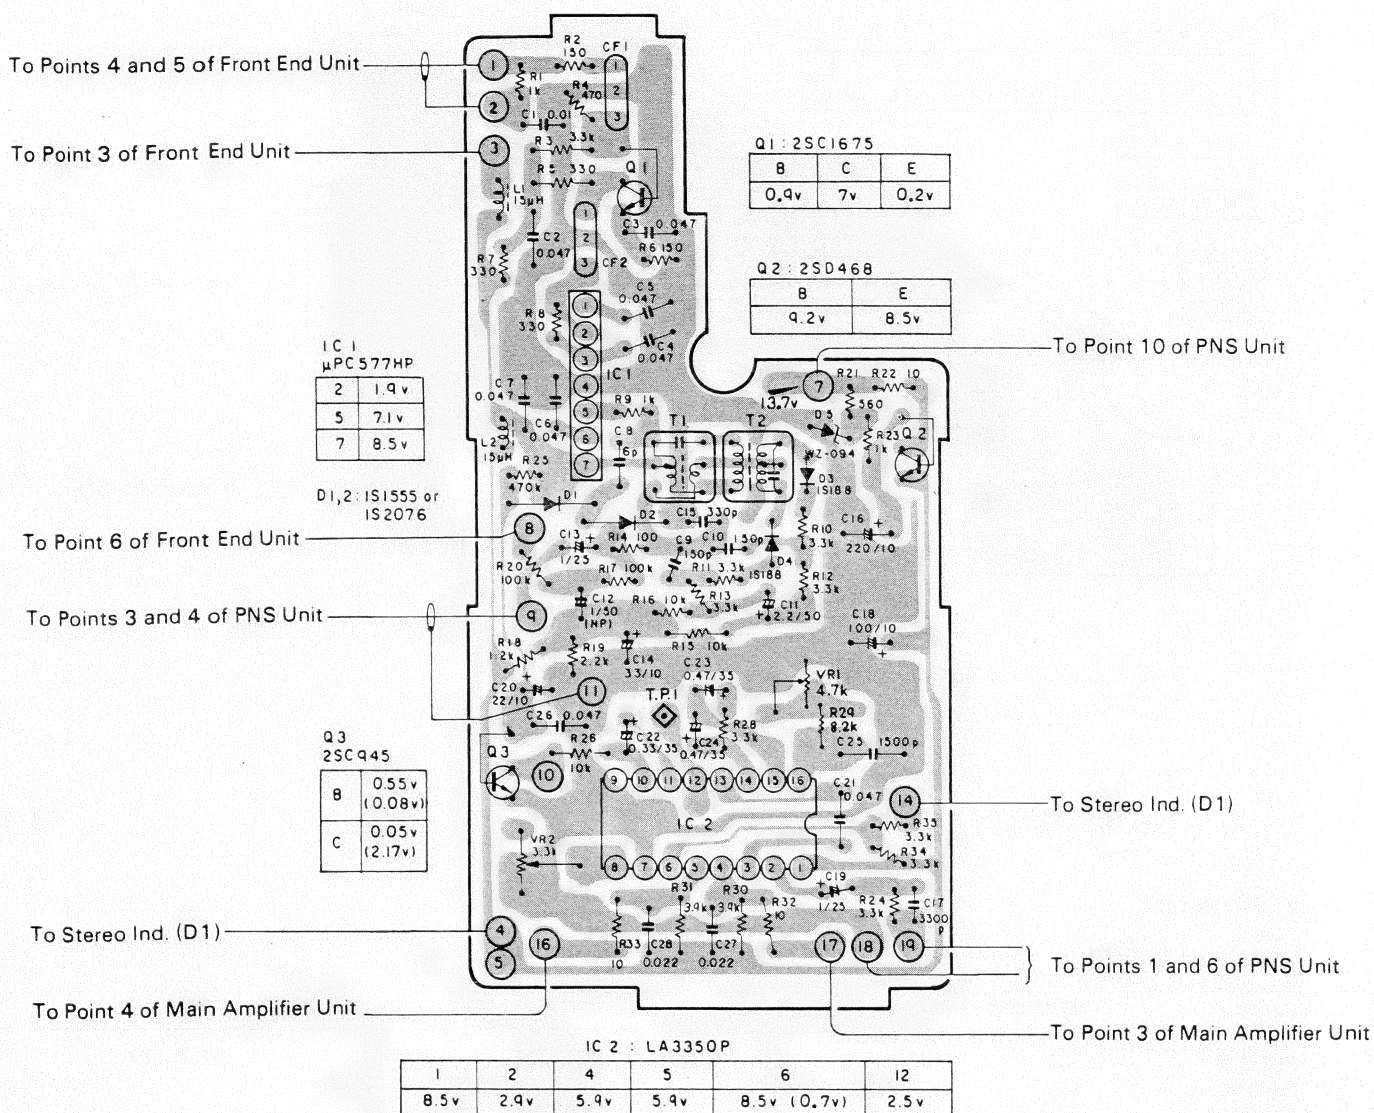


Fig. 29

IF/MPX UNIT (CWE-287)

● Parts List

MISCELLANEOUS

Part No.	Symbol & Description	
μPC577HP	IC1	
LA3350P	IC2	
2SC1675-M	Q1	
2SD468	Q2	
2SC945	Q3	
1S1555 or 1S2076	D1, D2	
1S188-FM-1	D3, D4	
WZ-094	D5	
CTF-016	L1, L2	Ferri-Inductor, 15μH
CTC-015	T1	IF Transformer (Yellow)
CTC-012	T2	IF Transformer (Blue)
C92-618	VR1	Volume, 4.7kΩ (B)
CCP-038	VR2	Semi-Variable Resistor, 3.3kΩ (B)
	CF1, CF2	Ceramic Filter

Note: When ordering resistors, convert the resistance value into code form, and then rewrite the part no. as before.

RESISTORS

Part No.	Symbol & Description	
RD1/8VS□□□J	R1—R13, R16—R26, R28—R35	
RD1/4PS□□□J	R14, R15	
VACANT	R27	

CAPACITORS

Part No.	Symbol & Description	
CKDYF 103Z 25	C1	
CKDYF 473Z 25	C2—C7, C26	
CCDSL 060D 50	C8	
CKDYB 151K 50	C9, C10	
CEA 2R2P 50	C11	
CEA 010M 50 NP	C12	
CSZA 010M 25	C13, C19	
CEA 330P 10	C14	
CKDYB 331K 50	C15	
CCH-028	C16	220μF/10V
CQMA 332J 50	C17	
CEA 101P 10	C18	
CEA 220P 10	C20	
CQMA 473K 50	C21	
CSZA R33M 35	C22	
CSZA R47M 35	C23, C24	
CQSA 152J 50	C25	
CQMA 223K 50	C27, C28	

17. MISCELLANEOUS PARTS LIST

Part No.	Symbol & Description	
CSN-055	S1	Reed Switch
CCS-123	VR1	Volume (Balance)
TLR-102	D1	Stereo Ind.
CEL-065	IL1	Lamp, 14V 60mA
E21-005	FU1	Fuse 2A
CPB-032 or CPB-034	HD1	Head
CXP-021	SO	Solenoid
CXM-046	M	Motor
CCG-022	TC1	Antenna Trimmer
CDH-026	ANT	Antenna Connector
CTH-025	L1	Coil, 4.7μH

18. CABINET EXPLODED VIEW

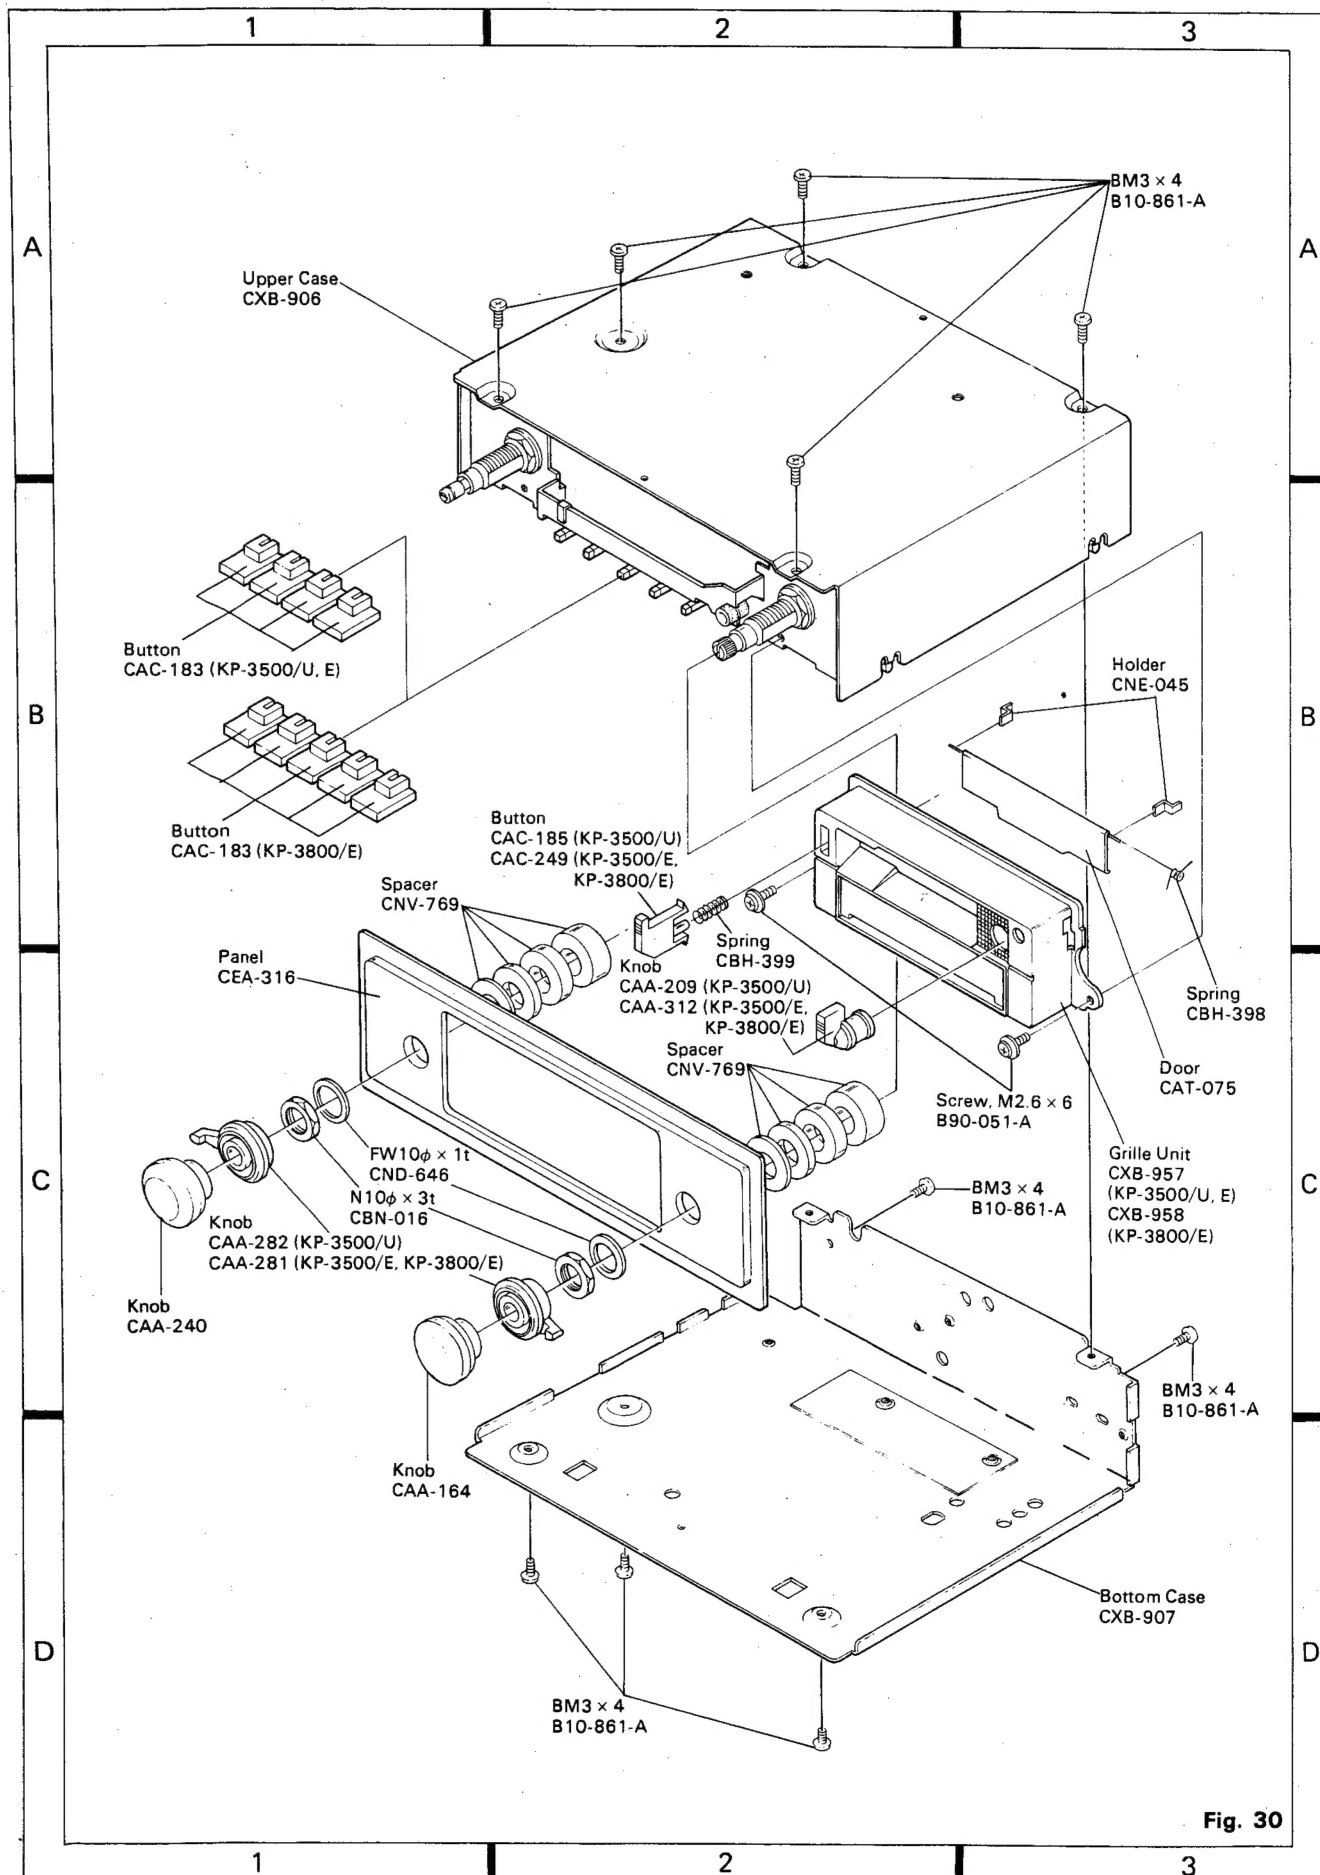


Fig. 30

19. CHASSIS EXPLODED VIEW

NOTICE: Parts whose parts numbers are omitted are subject to being not supplied.

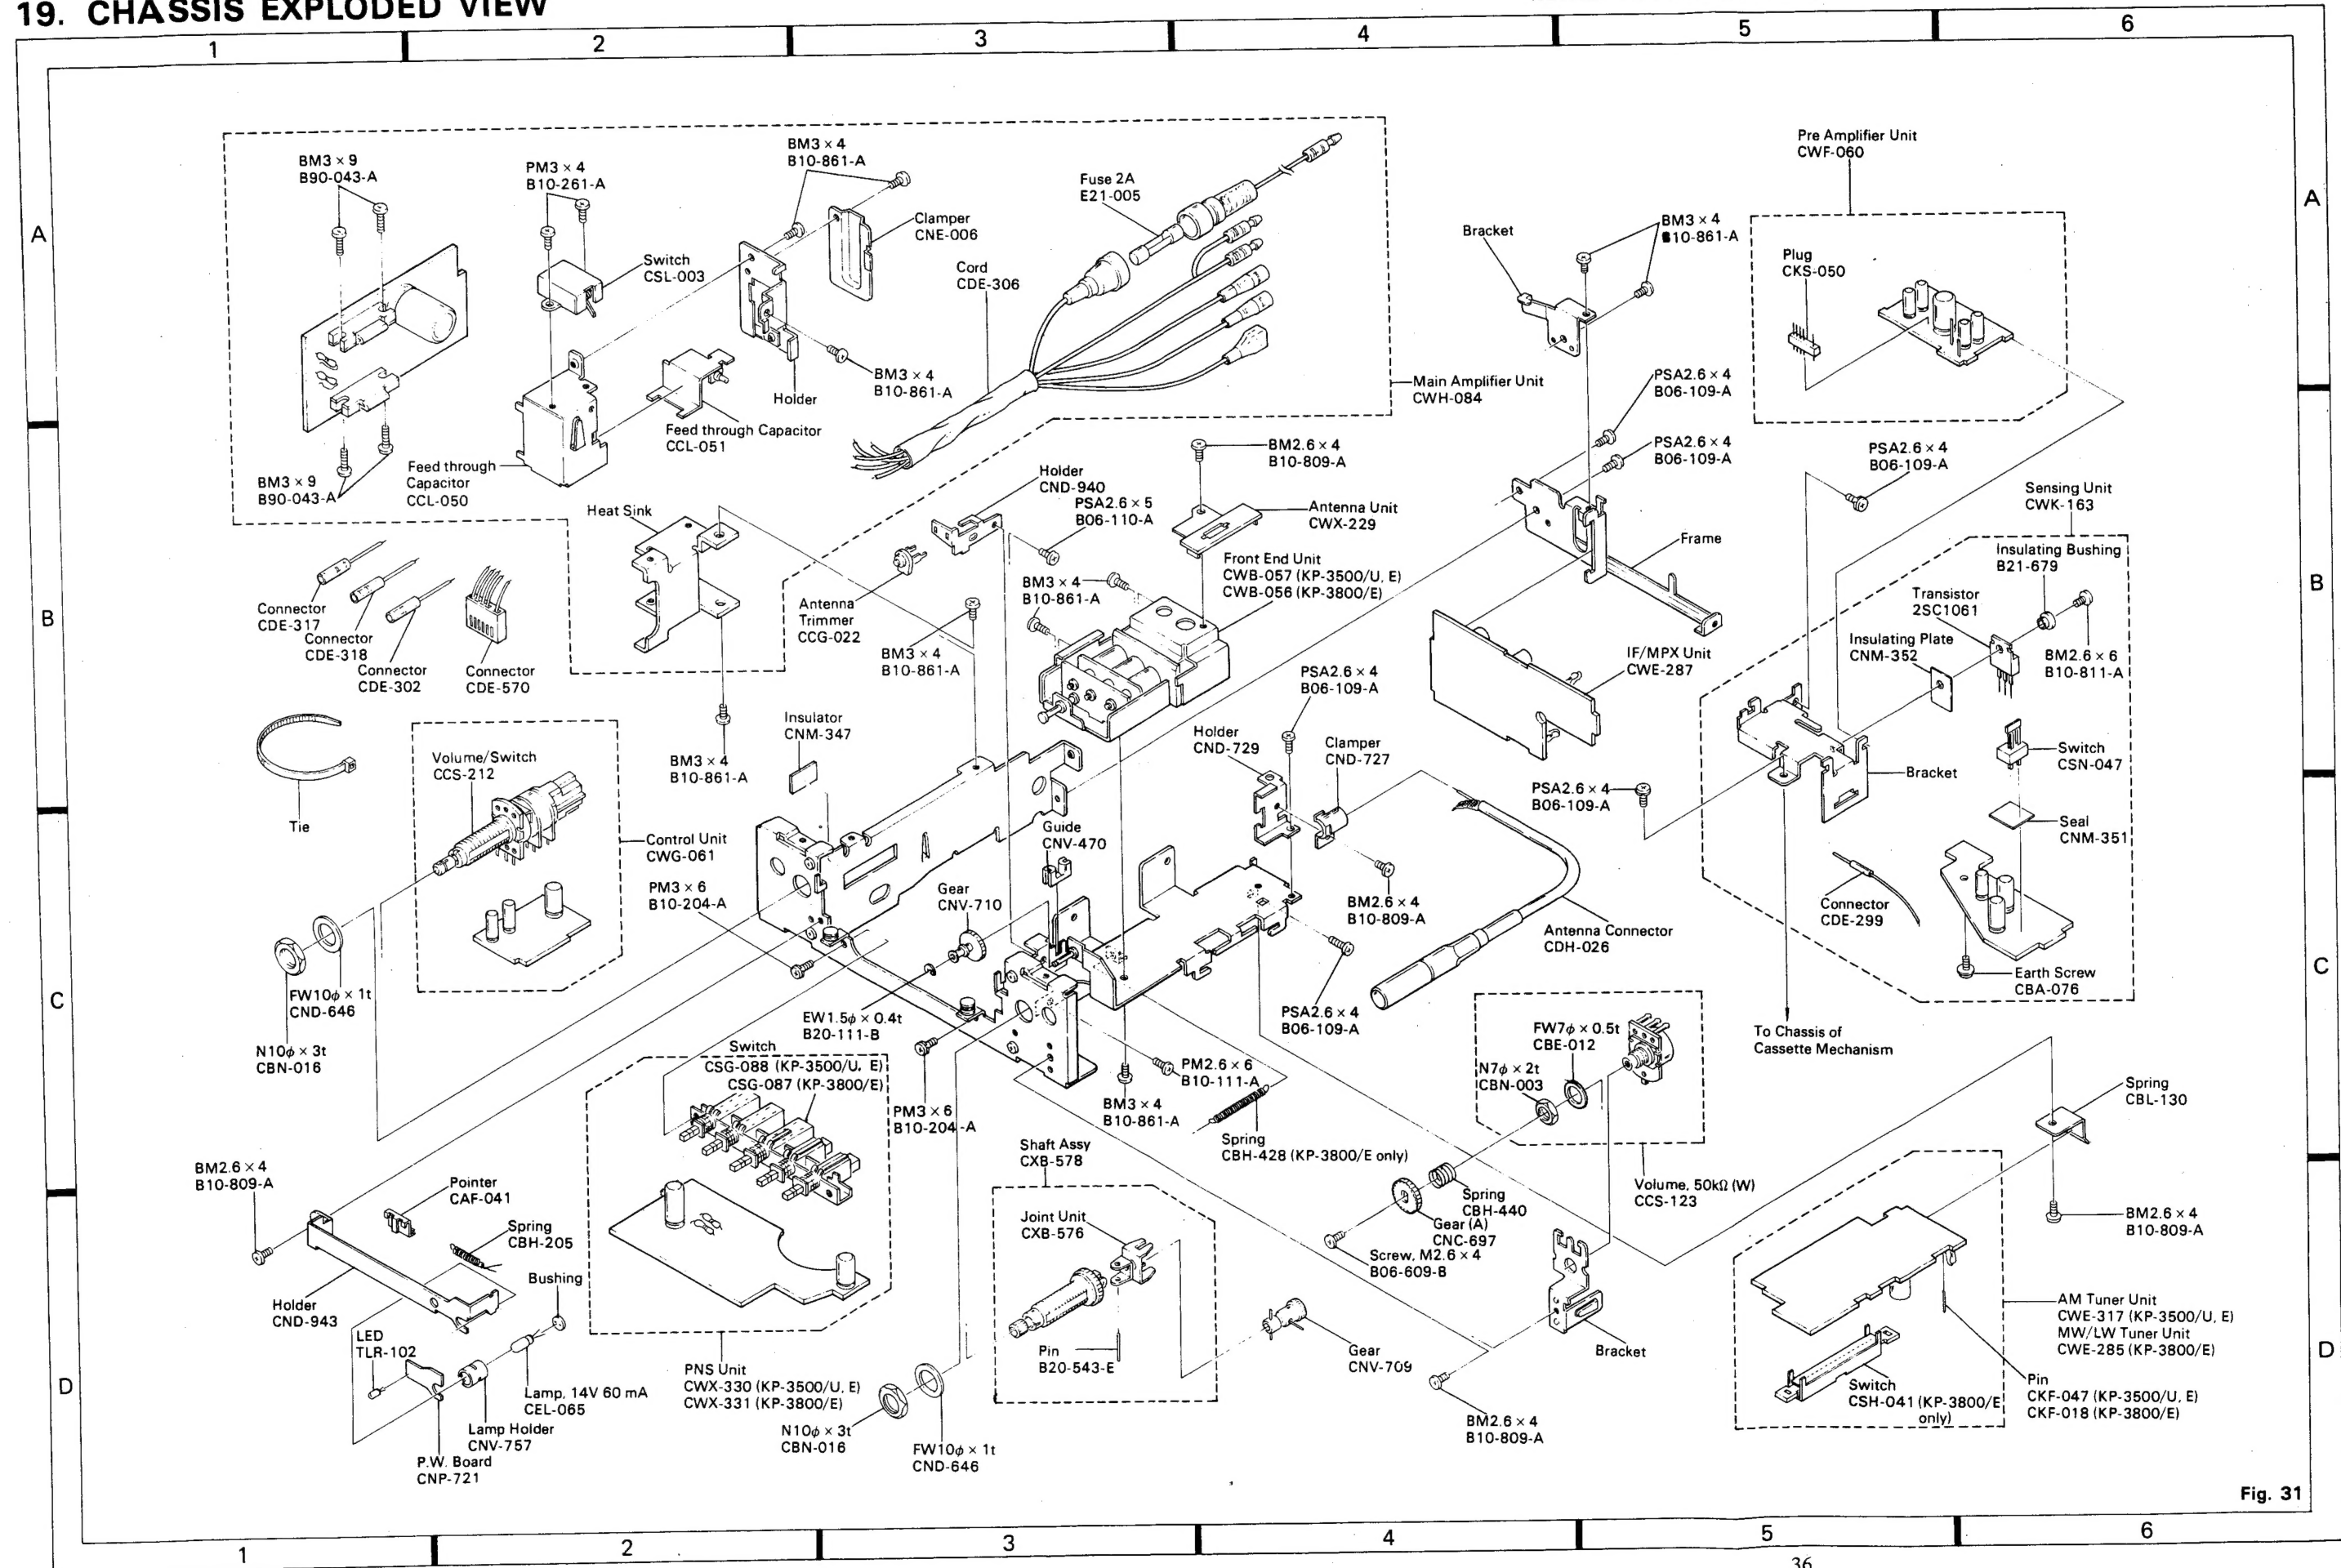


Fig. 31

20. PACKING METHOD

NOTICE: Parts whose parts numbers are omitted are subject to being not supplied.

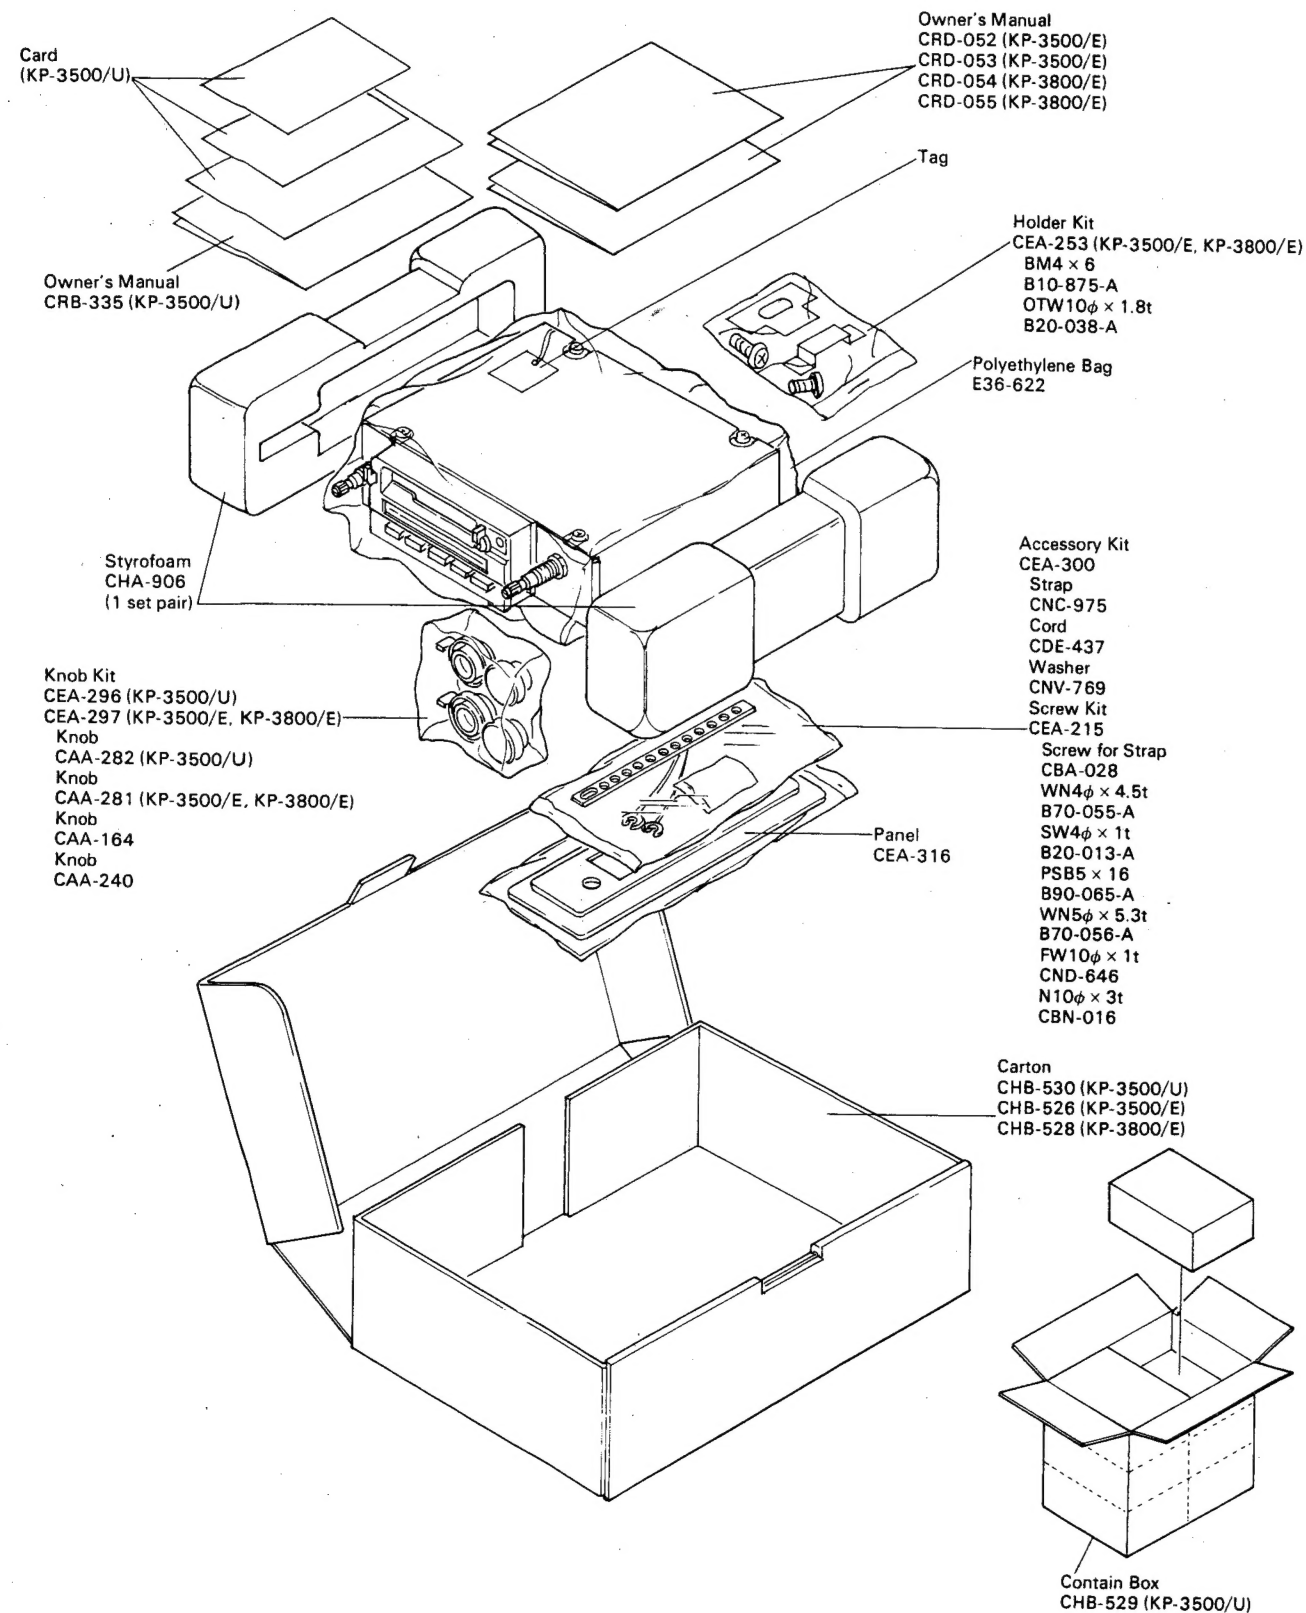


Fig. 32

PIONEER®-SERVICE

Telefon 0421/3169-0

Versandanschrift: Pioneer-Melchers GmbH, Flughafendamm 9, 2800 Bremen 1

Service-Leitung 04 21 / 31 69 278

Werkstatt 04 21 / 31 69 279

Reparaturen
Reparaturhilfen

Ersatzteile 04 21 / 31 69 277

Ersatzteilbestellungen
Technische Unterlagen

PIONEER-Melchers
Service

PIONEER-Melchers GmbH

Schlachte 41, 2800 Bremen 1, Postfach 10 25 60

PIONEER ELECTRONIC CORPORATION

4-1, Meguro 1-chome, Meguro-ku, TOKYO, 153, JAPAN

PIONEER ELECTRONICS OF AMERICA

1925E, Dominguez ST. Long Beach, Calif. 90810

PIONEER ELECTRONIC (EUROPE) N.V.

Luithagen-Haven 9, 2030 Antwerp, Belgium

PIONEER ELECTRONICS AUSTRALIA PTY. LTD.

178-184 Boundary Road, Braeside, Victoria 3195, Australia